

Government eProcurement System
Created By: Pramod Soni
Created Date/Time: 21-Oct-2021 04:12 PM
Tender Title: Repairing and maintenance of the existing 33kV four-pole structures of HT yard at S. V. Airport, Raipur.
Tender ID: 2021_AAI_88447_1

Tender Inviting Authority: Asst. Gen. Manager (E-E), Airports Authority of India, S.V. Airport, Raipur


Name of Work: Repairing and maintenance of the existing 33kV four-pole structures of HT yard at S. V. Airport, Raipur.


Contract No: 2021_AAI_88447

SCHEDULE OF WORK / ITEM(S)

Sl.No	Description of Work / Item(s)	No. of Qty	Units	Estimated Rate	M/S DURGA SUPPLY AGENCIES(GSTN-21ADAPP6465D12V)		SS ENERGY ENTERPRISES(GSTN-NA)	
					Rate	Amount	Rate	Amount
1.00	Supplying and erection of set 800 Amp triple pole single throw, gang operated out-door type double breaker 33kV Isolator with double post insulator and expulsion or horn gap type fuse down rod, tandem pipes & operating handle with locking arrangement at both the position etc. complete with nut, bolts, washer accessories as required. (Set of 3 Units)	6.00	Set	45298.50	50000.00	300000.00	48450.00	290700.00
2.00	Supplying and erection of single piece nonlinear resistor type Lightning Arrestor suitable for 3 wire, 33 kV overhead lines with rated voltage 30 kV (rms) with a nominal discharge current rating of 10 KA (station class) and complete with galvanized clamping arrangement, G.I. bolts, nuts, washers etc. as required. (set of 3 units)	2.00	Set	15217.67	15000.00	30000.00	19400.00	38800.00
3.00	Supplying and erection of Disc Insulator for 33 kV over head lines with galvanized insulator fittings, ball and socket type and complete with galvanized strain clamps, bolts, nuts, washers etc. as required.	12.00	Each	813.05	650.00	7800.00	1594.00	19128.00
4.00	Supplying and erection of 33 kV Pin Insulator complete with large steel head G.I. pin, nuts, washers etc. as required.	9.00	Each	555.50	500.00	4500.00	753.00	6777.00
5.00	Supplying and erection of single piece 400 Amp triple pole outdoor type Drop Out Fuse with Fuse as per relevant ISS and complete with galvanized clamping arrangement, G.I. bolts, nuts, washers along with double 33kV support Insulators, fuse barrel etc. as required. (Set of 3 Units)	2.00	Set	6969.00	10000.00	20000.00	14140.00	28280.00

L1 Amount	L1 Vendor
290700.00	SS ENERGY ENTERPRISES
30000.00	M/S DURGA SUPPLY AGENCIES
7800.00	M/S DURGA SUPPLY AGENCIES
4500.00	M/S DURGA SUPPLY AGENCIES
20000.00	M/S DURGA SUPPLY AGENCIES


25.10.21
Pramod Soni


21.10.21
Moush


21/10/21

6.00	Earthing with G.I. earth plate 600 mm X 600 mm X 6 mm thick including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe of 2.7 metre long etc. with charcoal/ coke and salt as required.	15.00	Each	5520.66	5000.00	75000.00	5000.00	75000.00
7.00	Providing and fixing 50 mm X 5 mm G.I. strip in 40 mm dia G.I. pipe from earth electrode including connection with G.I. nut, bolt, spring, washer excavation and re-filling etc. as required.	100.00	mtrs.	580.75	200.00	20000.00	200.00	20000.00
8.00	Supplying and spreading Stone Aggregate (Single size) : 40 mm nominal size spreading uniformly having 100mm bed thickness in HT yard area.	45.00	Cum	1452.38	1100.00	49500.00	735.00	33075.00
9.00	Supply and installation of "Dog" size Aluminium conductor in existing overhead structure complete with galvanized clamping arrangement, G.I. bolts, nuts, washers etc. as required and manufactured as per relevant (IS 398 PART 4).	50.00	mtrs.	92.92	200.00	10000.00	100.00	5000.00
10.00	Dismantling of triple pole single throw, gang operated existing 33kV Isolator along with tandem pipes & operating handle with locking arrangement installed in four pole structure (Set of 3 Units)	4.00	Set	987.78	500.00	2000.00	7000.00	28000.00
11.00	Dismantling of existing triple pole outdoor type Drop Out Fuse switch along with post Insulators installed in four pole structure (Set of 3 Units)	4.00	Set	610.04	300.00	1200.00	5000.00	20000.00
12.00	Supplying and erection MS Channel (ISMC) of size 100mmX50mmX5mm of suitable length along with suitable size hole for mounting of isolator, post/pin insulator and strengthening of existing four pole structure etc as required.	25.00	mtrs.	720.13	150.00	3750.00	2500.00	62500.00
13.00	Supplying and installing Mild Steel hot dip galvanized Pole Clamp of suitable size and thickness for clamping/holding the MS Channel in existing four pole structure with G.I. bolts, nuts, washers etc. complete with accessories as required.	10.00	Each	523.18	200.00	2000.00	250.00	2500.00
14.00	Painting of following MS pole/Rail poles, using one coat of metal primer on rusted surface and two coats of approved aluminium paint including scrapping and thoroughly cleaning the surface etc. as required.	55.00	Each	151.50	150.00	8250.00	500.00	27500.00

75000.00	M/S DURGA SUPPLY AGENCIES, SS ENERGY ENTERPRISES
20000.00	M/S DURGA SUPPLY AGENCIES, SS ENERGY ENTERPRISES
33075.00	SS ENERGY ENTERPRISES
5000.00	SS ENERGY ENTERPRISES
2000.00	M/S DURGA SUPPLY AGENCIES
1200.00	M/S DURGA SUPPLY AGENCIES
3750.00	M/S DURGA SUPPLY AGENCIES
2000.00	M/S DURGA SUPPLY AGENCIES
8250.00	M/S DURGA SUPPLY AGENCIES

Total in Figures

m
21/10/24

M. Manish
21.10.24


534000.00

657260.00

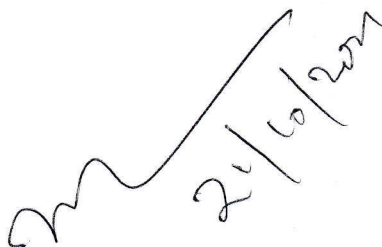
Lowest Amount Quoted BY: M/S DURGA SUPPLY AGENCIES(534000.00)

[Signature]
25.10.24
A. M. S. B.

BOQ Summary Details Tender Title: Repairing and maintenance of the existing 33kV four-pole structures of HT yard at S. V. Airport, Raipur. Tender ID: 2021_AAI_88447_1				
Sheet Name	Sl.No	Bidder Name	Amount	Bid Rank
BoQ1	1	M/S DURGA SUPPLY AGENCIES	534000.00	L1
	2	SS ENERGY ENTERPRISES	657260.00	L2


 25.10.21
 ADMIRAL

Moush
 21.10.21


 21/10/2021