



भारतीय विमानपत्तन प्राधिकरण
AIRPORTS AUTHORITY OF INDIA



E-mail Id: electrical-vidn@aai.aero Tel: 0135-2411011

पत्रांक सं.: एएआई/ डीडीएन/ इंजी(ई)/ फीडर पीलर/ सी डब्लू/ कार्य आदेश- 03/ 2022-23

दिनांक: 23.08.2022

Ref No. AAI/DDN/Engg-(E)/Feeder Pillars/ CW/W.O.- 03/ 2022-23

Date : 23.08.2022

सेवा में,

मैसर्स इंडस्ट्रियल ट्रेडर्स,
111, यादव इलेक्ट्रिक मार्केट,
जी.बी. मार्ग, लखनऊ - 226018

To,

M/s Industrial Traders,
111, Yadav Electric Market
G.B.Marg, Lucknow - 226018

विषय : देहरादून विमानपत्तन के परिचालन क्षेत्र/पैरामीटर रोड लाईट में मौजूदा फीडर पीलर को बदलने हेतु।

Subject : Replacement of existing feeder pillars in operational area/perimeter road lights at Dehradun Airport.

Ref.:

1. Your Technical bid opened on 10.08.2022
2. Your financial bid opened on 16.08.2022

महोदय/Sir,

1. ऊपर उल्लेखित कार्य हेतु आपका टेंडर कृते अध्यक्ष, भारतीय विमानपत्तन प्राधिकरण की ओर से स्वीकृत किया जाता है, आपके द्वारा बताये गये मद मूल्यों पर आपकी ई-टेंडर राशि रुपये 6,89,022/- छः लाख उन्नब्बे हजार बाईस मात्र) जीएसटी के बिना स्वीकृत किया जाता है, जो टेंडर की उचित लागत राशि रुपये 9,64,326/- (रु नौ लाख चौसठ हजार तीन सौ छब्बीस मात्र) जीएसटी के बिना से 28.55 % नीचे है।

Your tender for the work mentioned above is hereby accepted on behalf of the Chairman, Airports Authority of India, at the item rates quoted by you totaling to **Rs. 6,89,022/- (Rupees Six Lakhs Eighty Nine Thousand Twenty Two only) excluding GST** which is 28.55% Below to justified cost of **Rs. 9,64,326/- (Rupees Nine Lakhs Sixty Four Thousand Three Hundred Twenty Six only) excluding GST.**

2. सहायक महाप्रबन्धक (अभि.वि.) देहरादून विमानपत्तन कार्य के प्रभारी अभियन्ता होंगे। आपसे निवेदन है कि आप दिनांक 02.09.2022 तक सहायक महाप्रबन्धक (अभि.वि.) देहरादून हवाई अड्डा के कार्यालय में उपस्थित हो या आपकी ओर से एक विश्वसनीय प्रतिनिधि प्रतिनियुक्त करें जो करारनामों पर हस्ताक्षर के लिए अधिकृत हो तथा करारनामों को पूरा करें। ठेके का करारनामा रु 100/- के नॉनज्यूडिशियल स्टैम्प पेपर पर निष्पादित किया जाएगा, तथा पेपर का खर्च आपके द्वारा उठाया जाएगा।

Assistant General Manager (Engg-E) AAI, Dehradun Airport, Dehradun shall be the Engineer-In-charge of the work. You are requested to attend the office of Asstt. Gen.Mgr. (Engg-E), AAI, Dehradun Airport, Dehradun by 02.09.2022 to sign and complete the contract agreement. The contract agreement shall be executed on a non-judicial stamp paper of value Rs.100/- (Rupees One Hundred Only) and the cost of the stamp paper shall be borne by you.



भारतीय विमानपत्तन प्राधिकरण
AIRPORTS AUTHORITY OF INDIA



E-mail Id: electrical-vidn@aai.aero Tel: 0135-2411011

3. कृपया इस पत्र के जारी करने की तिथि से 10 दिन के अन्दर सुरक्षा जमा राशि के रूप में रु 68,902 /- जमा कराएं। अन्यथा अनुबन्ध की शर्तों के उपबन्ध संख्या 1। पृष्ठ संख्या 16 की शर्त के अनुसार रनिंग और अंतिम बिल से काटी जाएगी, जो कि करारनामे का हिस्सा होगा।

Please deposit Rs. 68,902 /- towards security deposit within 10 days from the date of issue of this letter, failing which, the same will be deducted from Running and Final Bill as per condition of contract, Clause no 1A on page 16 of the General Conditions of Contract which will form part of the agreement.

4. आपसे निवेदन है कि आप केन्द्रीय और राज्य सरकारों के 1970 के अधिनियम अनुबन्ध श्रम नियम तथा 1971 केन्द्रीय नियम अनुबन्ध श्रम नियम (नियमन तथा उन्मूलन एवं केन्द्र तथा राज्य सरकार के न्यूनतम वेतन अधिनियम और नियमों के प्रावधानों का अनुपालन करें।

You are requested to comply with the provisions of contract labour (Regulation and Abolition) act 1970 and Contract Labour (Regulation and abolition) Central rules 1971 and minimum wages act and rules thereof Central and State Governments.

5. श्रम के विभिन्न विधानों के अनुसार सम्बन्धित अधिकारियों से लाइसेंस/अनुमति लेने व पालन करने के लिए एकमात्र दायित्व ठेकेदार (करार फर्म/कम्पनी सहित) का होगा, जिसमें संविदा श्रम (विनियमन एवं उन्मूलन) अधिनियम, 1970 के अन्तर्गत लेबर लाइसेंस लेना भी शामिल है।

It will be the sole liability of the contractor (including the contracting firm/ company) to obtain and to abide by all necessary licenses/ permissions from the authorities concerned as provided under the various labour legislations including the labour licence obtained as per the provisions of the Contract Labour (Regulation & Abolition) Act, 1970.

6. कार्य के सन्तोषजनक पूरा होने पर, अन्तिम बिल निम्नलिखित दस्तावेजों के साथ इंजीनियर इन चार्ज को प्रस्तुत किया जायेगा।

On satisfactory completion of work, final bill shall be submitted by you to the Engineer-in-charge and same shall be processed with following documents :-

- I. आप का अन्तिम बिल।
Your final bill.
- II. आप और इंजीनियर इन चार्ज या उसके प्रतिनिधि द्वारा संयुक्त रूप से हस्ताक्षरित माप पुस्तिका।
Measurement book jointly signed by you and Engineer-in-charge or his authorised representative.
- III. इंजीनियर इन चार्ज द्वारा किया गया समापन प्रमाण पत्र।
Completion certificate issued by Engineer-in-charge.
- IV. अन्य सम्बन्धित दस्तावेज, यदि कोई हो।
Other relevant documents, if any.



भारतीय विमानपत्तन प्राधिकरण
AIRPORTS AUTHORITY OF INDIA



E-mail Id: electrical-vidn@aai.aero Tel: 0135-2411011

- 7 आपको निर्देश दिया जाता है कि आप तुरन्त सहायक प्रबन्धक (अभि.वि.) देहरादून विमानपत्तन से मिलें वह आपको साइट सौंपने की व्यवस्था करेगे।

You are also directed to contact Assistant Manager (Engg.-E), Dehradun Airport immediately who will arrange to hand over the site to you.

8. कृप्या नोट कर लें कि काम करने का अनुमानित समय 03 महीने है जो कि दिनांक 02.09.2022 से गिना जायेगा।

Please note that the time allowed for carrying out the work shall be 03 months which shall be reckoned from date 02.09.2022.

9. दोष दायित्व अवधि प्रमाणित समापन तिथि से 12 महीने की होगी। इस अवधि के दौरान किसी भी प्रकार के दोष होने पर आपको दोष अपने खर्चे पर ठीक कराना होगा, जिसकी जिम्मेदारी आपकी होगी।

You will be responsible to make good and rectify at your own expense of any defect which may develop or may be noticed within the Defects Liability Period of 12 months which shall be reckoned from the certified date of completion.

10. इस ठेके के सम्बन्ध में आगे का कोई भी पत्राचार सहायक महाप्रबन्धक (अभि.वि.), भारतीय विमानपत्तन प्राधिकरण देहरादून हवाई अड्डा, देहरादून के पते पर किया जाएगा।

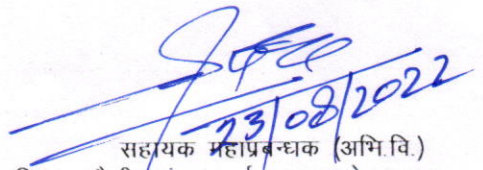
Any further correspondence in connection with the contract should normally be addressed to the Assistant General Manager (Engg.-E), AAI, Dehradun Airport, Dehradun.

11. कृप्या पावती भेजें और स्वीकृति के टोकन के रूप में संलग्न इस पत्र की दूसरी प्रति हस्ताक्षर करके वापस अधोहस्ताक्षरी को भेजें।

Please acknowledge the receipt and return the duplicate copy of this letter enclosed herewith after signing it, to the undersigned, as a token of acceptance.

धन्यवाद !

भवदीय


23/08/2022
सहायक महाप्रबन्धक (अभि.वि.)
भाविप्रा, जौली ग्रांट हवाई अड्डा, देहरादून
कृते एवं की ओर से
अध्यक्ष, भारतीय विमानपत्तन प्राधिकरण

Encl: Schedule of work (02 Pages)

**AIRPORTS AUTHORITY OF INDIA
DEHRADUN AIRPORT**

SCHEDULE OF QUANTITIES

Name of Work : Replacement of existing feeder pillars in operational Area perimeter road lights at Dehradun Airport.

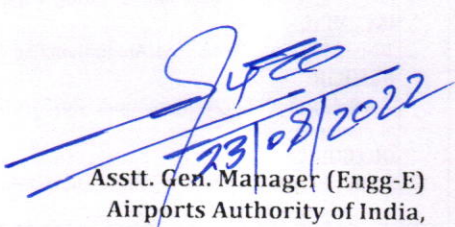
S.No	Description of Item	Qty	Unit	Rate (Rs.)	Amount (Rs.)
1	Supply, installation, testing & commissioning of Feeder Pillar for external lighting, 3phase, 4 wire, 400 / 440 volts, 50 Hz AC distribution, weather ,dust and water proof outdoor type Feeder Pillar of themoplastic polycarbonate construction with illuminating lamp with control switch, a set of insulated link, front and back double doors double hinges and handles for opening the door, locking on both the doors with two keys for each lock, 3mm thick MS base plate for brass compression cable glands, danger plate, cable entry and cable connections from rear part, suitable G.I. earth bus with Protection IP-54 and size 1350H*1050W*400D sq.mm and 600mm height stand (Job includes construction of cement concrete base with necessary brick work as per actual site requirement) following, complete i/c dismantalling of existing feeder pillar all end terminations, schematic drawing & specifications as required. FOR PERIMETER ROAD LIGHTING INCOMING - 1 No -185 Sqmm Armoured. Aluminium Cable 1 No - 100 Amps, 4P, 25KA, MCCB 1 No - 100 Amps, 4P, Power Contactor BUS-BAR- 1 set- 4 x 250 Amps Aluminium Busbars made of electrolytic high conductivity aluminium of suitable size. OUTGOINGS- 2 Nos -25 Sqmm Armoured. Aluminium Cable 2 Nos - 40 Amps DP, RCBO, 300 mA 3 Nos - 6 Amps SP,10 KA 1 No - Auto sensors / timers	4	Job	116,000.00	464,000.00
2	Supply, installation, testing & commissioning of Feeder Pillar for power supply, 3phase, 4 wire, 400 / 440 volts, 50 Hz AC distribution,weather ,dust and water proof outdoor type Feeder Pillar of themoplastic polycarbonate construction with illuminating lamp with control switch, a set of insulated link, front and back double doors with inner side asbestos sheet lining, double MS hinges and MS handles for opening the door, locking on both the doors with two keys for each lock, 3mm thick MS base plate for brass compression cable glands, danger plate, cable entry and cable connections from rear part, suitable G.I. earth bus with Protection IP-54 size 1050H*600W*400Dsq.mm and 600mm height stand (Job includes construction of cement concrete base with necessary brick work as per actual site requirement)with following, complete schematic drawing & specifications as required. INCOMING - 1 No -240 Sqmm Armoured. Aluminium Cable BUS-BAR- 1 set-4 x 300 Amps Aluminium Busbars made of electrolytic high conductivity aluminium of suitable size. OUTGOINGS- 1 No -240 Sqmm Armoured. Aluminium Cable	2	Job	68,222.00	136,444.00

[Handwritten Signature]
AGM (B-E)

S.No	Description of Item	Qty	Unit	Rate (Rs.)	Amount (Rs.)
3	Supply, installation, testing & commissioning of Feeder Pillar for power supply, 3phase, 4 wire, 400 / 440 volts, 50 Hz AC distribution, weather ,dust and water proof outdoor type Feeder Pillar of themoplastic polycarbonate construction with illuminating lamp with control switch, a set of insulated link, front and back double doors with inner side asbestos sheet lining, double MS hinges and MS handles for opening the door, locking on both the doors with two keys for each lock, 3mm thick MS base plate for brass compression cable glands, danger plate, cable entry and cable connections from rear part, suitable G.I. earth bus with Protection IP-54 size 1050H*600W*400Dsq.mm and 600mm height stand (Job includes construction of cement concrete base with necessary brick work as per actual site requirement)with following, complete schematic drawing & specifications as required. <u>INCOMING-</u> 1 No -185 Sqmm Armoured. Aluminium Cable <u>BUS-BAR-</u> 1 set-4 x 250 Amps Aluminium Busbars made of electrolytic high conductivity aluminium of suitable size. <u>OUTGOINGS-</u> 1 No -185 Sqmm Armoured. Aluminium Cable 1 No -50 Sqmm Armoured. Aluminium Cable	1	Job	39,222.00	39,222.00
4	Supply and making end termination with brass compression gland and aluminium lugs (set of 1 gland and 4 lugs) for following size of PVC insulated and PVC sheathed /XLPE aluminium conductor cable of 1.1 KV grade as required .				
	i) 3.5x240 sq. mm	4	Set	1,022.00	4,088.00
	ii) 3.5x185sq. mm	6	Set	682.00	4,092.00
	iii) 3.5x50 sq. mm	1	Set	572.00	572.00
	iv) 4x25 sq. mm	8	Set	502.00	4,016.00
5	Earthing with G.I. earth pipe 4.5 metre long, 40 mm dia. including accessories, and providing masonry enclosure with cover plate having locking arrangement and watering pipe etc. with charcoal/ coke and salt as required.	4	Set	8,822.00	35,288.00
6	Supplying and laying 6 SWG G.I. wire at 0.50 metre below ground level for conductor earth electrode, including connection/ termination with GI thimble etc. as required.	25	Metre	52.00	1,300.00
Total Rs. (Without GST)					689,022.00

(Rs. Six Lac Eighty Nine Thousand Twenty Two Only)

Note : Rates are inclusive of all the taxes but without GST.


23/08/2022
Asstt. Gen. Manager (Engg-E)
Airports Authority of India,
Dehradun Airport