



भारतीय विमानपत्तन प्राधिकरण

जय. प्र. ना. अंतरा. विमानपत्तन, पटना- 800014.

AIRPORTS AUTHORITY OF INDIA

J.P.N.I. AIRPORT, PATNA-800014.



आई.एस.ओ.9001:2008 प्रमाणित

आई.एस.ओ.14001:2004 प्रमाणित

द्रुतगामी डाक/Speed Post

संदर्भ सं. भाविप्रा/पट/स.महा.प्र.(अभि0-सि0)/का.आ-06/2022-23/

दिनांक : 14/10/2022

Ref. No:- AAI/PAT/AGM(Engg.-C)/W.O.-06/2022-23/7220-26

Date : 14/10/2022

18

सेवा में/To,

मेसर्स अवधेश कन्स्ट्रक्शन,

M/s Awadhesh Construction,

220, ए0 पी0 कॉलोनी,

220, A.P. Colony,

गया, बिहार — 823001.

Gaya, Bihar-823001.

(Email Id/ Mobile No. — awadheshconstruction82@gmail.com/ 9431647643)

विषय:- जय प्रकाश नारायण अंतर्राष्ट्रीय हवाई अड्डा, पटना में न्यू डी0भी0ओ0आर0 और रनवे एग्जिट रोड को जोड़ने के लिए पेरीमीटर रोड का निर्माण साथ ही अन्य संबद्ध सिविल कार्य।

Subject:- Construction of Perimeter Road for connecting New D.V.O.R. and Runway Exit Road along with other allied Civil Works at JPNI Airport, Patna.

संदर्भ : ई-टेन्डरिंग द्वारा आपकी निविदा दिनांक 28-09-2022

Ref : Your e-tender dated 28.09.2022 through e-tendering

महोदय,/Sir,

1. उल्लेखित कार्य हेतु आपकी निविदा संलग्न अनुसूची के अनुसार आपके द्वारा उद्धृत कुल रू0 **2,96,71,205/-** (रूपये दो करोड़ छियान्वे लाख एकहत्तर हजार दो सौ पॉच मात्र) की नियत मद दर पर अध्यक्ष, भारतीय विमानपत्तन प्राधिकरण की ओर से एतद् द्वारा स्वीकृत की जाती है। जो निविदा हेतु तय अनुमानित लागत रू0 **2,37,46,553/-** (रूपये दो करोड़ सैंतीस लाख छियालीस हजार पॉच सौ तिरेपन मात्र) से **24.95%** (चौबीस दशमलव नौ पांच प्रतिशत) ऊपर है।

Your tender for the work mentioned above is hereby accepted on behalf of Chairman, Airports Authority of India, at the item rates quoted by you totaling to **Rs. 2,96,71,205/- (INR Two Crores Ninety Six Lakhs Seventy One Thousand Two Hundred & Five only)** which is **24.95% (Twenty Four Point Nine Five Percent)** above estimated cost put to tender of **Rs. 2,37,46,553/- (INR Two Crores Thirty Seven Lakhs Forty Six Thousand Five Hundred & Fifty Three only)**.

2. संयुक्त महाप्रबंधक, (अभियांत्रिकी-सिविल), भारतीय विमानपत्तन प्राधिकरण, ज0प्र0ना0अं0 हवाई अड्डा, पटना इस कार्य के प्रभारी अभियंता होंगे।

Jt. General Manager (Engg-C), Airports Authority of India, J.P.N.I. Airport, Patna shall be the Engineer-in-charge of the work.

3. आपसे अनुरोध है कि आप संविदा करार पर हस्ताक्षर करने एवं उसे पूरा करने हेतु **27.10.2022** तक संयुक्त महाप्रबंधक, (अभियांत्रिकी-सिविल), भारतीय विमानपत्तन प्राधिकरण, ज0प्र0ना0अं0 हवाई अड्डा, पटना के कार्यालय में उपस्थित हों। संविदा करार रू0 **1000/-** (रूपये एक हजार मात्र) के न्यायिकेतर (नॉन-जुडिशियल) स्टॉप पेपर पर बनाया जाएगा तथा स्टॉप पेपर की लागत आपके द्वारा वहन की जाएगी।



भारतीय विमानपत्तन प्राधिकरण

जय. प्र. ना. अंतरा. विमानपत्तन, पटना- 800014.

AIRPORTS AUTHORITY OF INDIA

J.P.N.I. AIRPORT, PATNA-800014.



आई.एस.ओ.9001:2008 प्रमाणित

आई.एस.ओ.14001:2004 प्रमाणित

You are requested to attend the office of the Jt. General Manager (Engg.-Civil), Airports Authority of India, J.P.N.I. Airport, Patna by **27.10.2022** to sign and complete the contract agreement. The contract agreement shall be executed on a non-judicial stamp paper of value of **Rs. 1000/- (Rupees One Thousand only)** and the cost of the stamp paper shall be borne by you.

4. आपकी निविदा के साथ प्राप्त **रु० 4,74,932/-** (रुपये चार लाख चौहत्तर हजार नौ सौ बत्तीस मात्र) की अग्रिम धन राशि को संविदा दस्तावेज के पृष्ठ 50 के शर्त सं० 17 के अनुसार प्रतिभूति जमा के रूप में प्रयुक्त तथा संपरिवर्तित किया जाएगा। कृपया इस पत्र के जारी होने की तिथि से 10 दिनों के भीतर शेष प्रतिभूति जमा के रूप में **रु० 24,92,189/-** (रुपये चौबीस लाख बेरान्चे हजार एक सौ नवासी मात्र) जमा करें अन्यथा इस राशि की कटौती संविदा कागजात के पृष्ठ 76 के अनुबंध के खंड की धारा 1 (ए) के अनुसार आपके चालू बिलों से कर ली जाएगी।

The Earnest Money amount of **Rs. 4,74,932/- (Rupees Four Lakh Seventy Four Thousand Nine Hundred & Thirty Two only)** received along with your tender will be treated and converted as part of Security Deposit, as per Condition 17 on page 50 of the contract document. Please deposit **Rs. 24,92,189/- (Rupees Twenty Four Lakhs Ninety Two Thousand One Hundred & Eighty Nine only)** towards balance Security Deposit within 10 (Ten) days from the date of issue of this letter, failing which, the same will be deducted as per Clause 1 (A) of Clause of Contract on page 76 of the contract document.

5. आप से अनुरोध है कि आप संविदा श्रम (विनियम एवं उन्मूलन) अधिनियम 1970 तथा संविदा श्रम (विनियम एवं उन्मूलन) केन्द्रीय नियम 1971 एवं न्यूनतम मजदूरी अधिनियम के प्रावधानों और केन्द्रीय व राज्य सरकारों के तदसंबंधी नियमों का अनुपालन करें।

You are requested to comply with the provision of contract labour (Regulation & abolition) Act of 1970 and contract labour (Regulation & abolition) Central Rules 1971 and minimum wages Act and Rules thereof central and State Govt.

6. आपको प्रबंधक (अभियांत्रिकी-सिविल), भारतीय विमानपत्तन प्राधिकरण, पटना हवाई अड्डा, से तत्काल संपर्क करने का भी निर्देश दिया जाता है जो आपको कार्यस्थल (साइट) सौंपने का व्यवस्था करेंगे।

You are requested to contact Manager (Engg.-C), Airports Authority of India, Patna Airport, immediately, who will arrange to hand over the site to you.

7. कृपया नोट करें कि कार्य पूरा करने के लिए आपको **05 (पॉंच) महिने** का समय प्रदान किया जाता है। यह समय कार्य आदेश जारी होने की तारीख से 10वें दिन या साईट हैंड ओवर करने के दिन, जो भी पहले हो, से माना जाएगा।

Please note that the time allowed for carrying out the work shall be **05 (Five) Months** and same shall be reckoned from 10th day of issue of this work order or handing over of site whichever is earlier.

8. संविदा के संबंध में भविष्य में किसी भी प्रकार का पत्र व्यवहार सामान्यतः प्रभारी-अभियंता के नाम से किया जाएगा।

Any further correspondence in connection with the contract should normally be addressed to the Engineer-In-Charge.

9. कृपया पत्र की पावती भेजें तथा साथ में संलग्न इस पत्र की दूसरी प्रति पर स्वीकारोक्ति के रूप विधिवत् हस्ताक्षर करके हमें वापस भेजें।

Please acknowledge the receipt and return the duplicate copy of this letter enclosed herewith after duly signing it to the undersigned as a token of acceptance.



भारतीय विमानपत्तन प्राधिकरण

जय. प्र. ना. अंतरा. विमानपत्तन, पटना- 800014.

AIRPORTS AUTHORITY OF INDIA

J.P.N.I. AIRPORT, PATNA-800014.



आई.एस.ओ.9001:2008 प्रमाणित

आई.एस.ओ.14001:2004 प्रमाणित

10. यदि कोई विसंगति पाई जाती है तो अंग्रेजी भाषा ही मान्य होगी।

In Case any discrepancy is found, then English version will be taken as correct.

भवदीय/Yours faithfully

(आर० के० पराशर/R.K. Parasher)

सहायक महाप्रबंधक (इंजीनियरिंग – सिविल)

Asstt. General Manger (Engg.-C)

भाविप्रा, ज०प्र०ना०अ०हवाई अड्डा, पटना

AAI, J.P.N.I. Airport, Patna

के लिए एवं तरफ से अध्यक्ष

For and on behalf of Chairman

भारतीय विमानपत्तन प्राधिकरण

Airports Authority of India

संलग्नक:- अनुसूची – 'अ'

Enclosure: Schedule 'A'

मुल प्रति पर नहीं/N.O.O.

प्रतिलिपि/Copy to:-

1. The Regional Executive Director (E/R), AAI, Operational Offices, NSCBI Airport, Kolkata-52
2. The General Manager (Engg), (E/R), AAI, Operational Offices, NSCBI Airport, Kolkata-52
3. The General Manager (Fin), (E/R), AAI, Operational Offices, NSCBI Airport, Kolkata-52
4. The General Manager (Engg.-P), AAI, JPNI Airport, Patna- 14
5. The Airport Director, AAI, JPNI Airport, Patna- 14
6. The Jt. General Manager (Engg.-C), AAI, JPNI Airport, Patna- 14
7. The Jt. General Manager (Finance), AAI, JPNI Airport, Patna- 14
8. The AGM (Vig.), (E/R), AAI, Operational Offices, NSCBI Airport, Kolkata-52
9. The Manager (Engg.-C), AAI, JPNI Airport, Patna- 14
10. The Regional Labour Commissioner (Central), Mauryalok Complex, A Block, 2nd Floor, Room No. 6 &16, Patna -01
11. The Regional Provident Fund Commissioner, Bhavishat Nidhi Bhawan, Road No.- 6, R - Block, Patna – 01
12. Work File.
13. Office Copy

(आर० के० पराशर/R.K. Parasher)

सहायक महाप्रबंधक (इंजीनियरिंग – सिविल)

Asstt. General Manger (Engg.-C)

भाविप्रा, ज०प्र०ना०अ०हवाई अड्डा, पटना

AAI, J.P.N.I. Airport, Patna

के लिए एवं तरफ से अध्यक्ष

For and on behalf of Chairman

भारतीय विमानपत्तन प्राधिकरण

Airports Authority of India

Government eProcurement System

Created By: Rajnish Parasher

Created Date/Time: 28-Sep-2022 06:02 PM

Tender Title: Construction of Perimeter Road for connecting New D.V.O.R and Runway Exit Road along with other allied Civil Works at JPNI Airport, Patna

Tender ID: 2022_AAI_127223_1

Tender Inviting Authority: <Asstt. G.M. (Engg.-Civil), JPNI Airport, Patna>

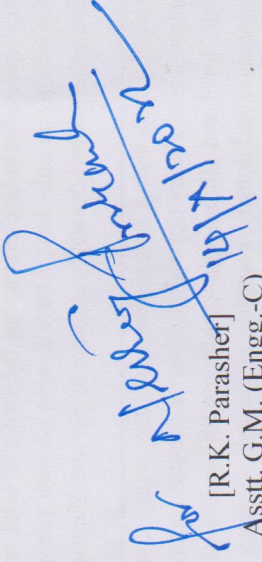
Name of Work: <Construction of Perimeter Road for connecting New D.V.O.R. and Runway Exit Road along with other allied Civil Works at JPNI Airport, Patna.>

Contract No: <2022_AAI_127223>

SCHEDULE OF WORK / ITEM(S)

Sl. No	Description of Work / Item(s)	No. of Qty	Units	M/s Awadhash Construction (GSTN-NA)	Amount
1	Surface dressing of the ground including removing vegetation and inequalities not exceeding 15 cm deep and disposal of rubbish, lead up to 50 m and lift up to 1.5 m. : All kinds of soil	4,595.00	Sqm	25.00	1,14,875.00
2	Earth work in excavation by mechanical means (Hydraulic excavator)/ manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge. All kinds of soil	2,960.00	Cum	195.00	5,77,200.00
3	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidating each deposited layer by ramming and watering, lead up to 50 m and lift upto 1.5 m.	888.00	Cum	215.00	1,90,920.00
4	Preparation and consolidation of sub grade with power road roller of 8 to 12 tonne capacity after excavating earth to an average of 22.5 cm depth, dressing to camber and consolidating with road roller including making good the undulations etc. and re-rolling the sub grade and disposal of surplus earth with lead upto 50 metres.	5,020.00	Sqm	200.00	10,04,000.00
5	Construction of granular sub-base by providing close graded Material conforming to specifications, mixing in a mechanical mix plant at OMC, carriage of mixed material by tippers to work site, for all leads & lifts, spreading in uniform layers of specified thickness with motor grader on prepared surface and compacting with vibratory power roller to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge. With material conforming to Grade-I (size range 75 mm to 0.075 mm) having CBR Value-30	1,413.00	Cum	3,860.00	54,54,180.00
6	Providing, laying, spreading and compacting graded stone aggregate (size range 53 mm to 0.075 mm) to wet mix macadam (WMM) specification including premixing the material with water at OMC in for all leads & lifts, laying in uniform layers with mechanical paverfinisher in sub- base / base course on well prepared surface and compacting with vibratory roller of 8 to 10 tonne capacity to achieve the desired density, complete as per specifications and directions of Engineer-in-Charge.	1,341.00	Cum	3,980.00	53,37,180.00
7	Providing and laying bituminous macadam using crushed stone aggregates of specified grading premixed with bituminous binder, transported to site by tippers, laid over a previously prepared surface with paver finisher equipped with electronic sensor to the required grade, level and alignment and rolling with smooth wheeled, vibratory and tandem rollers as per specifications to achieve the desired compaction and density, complete as per specifications and directions of Engineer-in-Charge. 50 to 100 mm average compacted thickness with bitumen of grade VG-30 @ 3.50% (percentage by weight of total mix) prepared in Batch Type Hot Mix Plant of 100-120 TPH capacity.	302.00	Cum	11,850.00	35,78,700.00

Sl. No	Description of Work / Item(s)	No. of Qty	Units	M/s Awadhesh Construction (GSTN-NA)	
				Rate	Amount
8	Providing and applying tack coat using hot straight run bitumen of grade VG - 30, including heating the bitumen, spraying the bitumen with mechanically operated spray unit fitted on bitumen boiler, cleaning and preparing the existing road surface as per specifications : On bituminous surface/ WMM surface @ 0.25 Kg/sqm	12,542.00	Sqm	30.00	3,76,260.00
9	Providing and laying Bituminous concrete using crushed stone aggregates of specified grading, premixed with bituminous binder and filler, transporting the hot mix to work site by tippers, laying with paver finisher equipped with electronic sensor to the required grade, level and alignment and rolling with smooth wheeled, vibratory and tandem rollers to achieve the desired compaction and density as per specification, complete and as per directions of Engineer-in-Charge. 40/50 mm compacted thickness with bitumen of grade VG-30 @ 5.5% (percentage by weight of total mix) and lime filler @ 3% (percentage by weight of Aggregate) prepared in Batch Type Hot Mix Plant of 100-120 TPH capacity.	292.00	Cum	13,780.00	40,23,760.00
10	4 cm thick bitumastic sheet with hot bitumen of approved quality, using stone chippings (60% with 12.5 mm nominal size and 40% with 10 mm nominal size) @ 2.60 cum per 100 sqm and coarse sand @ 2.60 cum per 100 sqm of road surface and with bitumen @ 56 kg/cum of stone chippings and @ 128 kg/cum of sand over a tack coat with hot straight run bitumen, including consolidation with road roller of 8 to 10 tonne etc. complete. (tack coat to be paid separately) : With paving asphalt grade VG - 30 with no solvent	9,192.00	Sqm	640.00	58,82,880.00
11	Providing and laying factory made chamfered edge Cement Concrete paver blocks in footpath, parks, lawns, drive ways or light traffic parking etc, of required strength, thickness & size/ shape, made by table vibratory method using PU mould, laid in required colour & pattern over 50mm thick compacted bed of sand, compacting and proper embedding/laying of inter locking paver blocks into the sand bedding layer through vibratory compaction by using plate vibrator, filling the joints with sand and cutting of paver blocks as per required size and pattern, finishing and sweeping extra sand. complete all as per direction of Engineer-in-Charge. : 60mm thick cement concrete paver block of M-35 grade with approved colour, design & pattern	3,250.00	Sqm	885.00	28,76,250.00
12	Providing 1 no. AC SUV vehicle (Mahindra Scorpio/ Innova and above not more than 1 year old with driver, fuel and all maintenance in shift of 12 hours (day and night) including weekends, Govt. Holiday and festivals with monthly limit of 1500 KM per month all complete as per direction and satisfaction of Engineer-in-charge.	5.00	per month	51,000.00	2,55,000.00
	Total in Figures				296,71,205.00


 [R.K. Parasher]
 Asstt. G.M. (Engg.-C)
 AAI, JPNI Airport, Patna.