



भारतीय विमानपत्तन प्राधिकरण AIRPORTS AUTHORITY OF INDIA

AAI/SRN/Engg.(C)/D D1 -II/2022-23/W- 224/1810

Date :-09.02.2023

To,
मेसर्स सिद्धार्थलक्ष्मी इंजीटेक प्राइवेट लिमिटेड,
3/113, विशाल खंड, गोमती नगर,
लखनऊ, यूपी-226001

To,
M/s.Siddharthalaxmi Engitech Pvt.Ltd,
3/113, Vishal Khand, Gomti Nagar,
Lukhnow, U.P-226001

विषय:- श्रीनगर अंतरराष्ट्रीय हवाई अड्डे श्रीनगर पर क्रॉस ड्रेनेज के समानांतर मौजूदा टैक्सी वे डी एंड डी 1 भागों का निराकरण और पुनर्निर्माण-दूसरी कॉल

Subject: Dismantling and re-construction of existing Taxiway D & D1 portions parallel to cross drainage at Srinagar International Airport Srinagar-2nd Call.

Tenderid : 2022_AAI_139479_1
सन्दर्भ :- आपकी ई-निविदा दिनांक 02.02.2023 को खोली गयी।
Ref. - Your e-tender Opened on dated - 02.02.2023

महोदय/ Dear Sir (s).

- 1 ऊपर उल्लेखित कार्य हेतु आपकी ई-निविदा, भारतीय विमानपत्तन प्राधिकरण की ओर से आपके द्वारा बताए गए मंद मूल्यों पर आपकी टेंडर राशि कुल **₹.65,80,746/-** (रुपये सैंसठ लाख अस्सी हजार सात सौ छियालीस मात्र) (जीएसटी के बिना), जो कि निविदा की अनुमानित लागत **₹75,14,860** (रुपये पचहत्तर लाख चौदह हजार आठ सौ साठ मात्र) से 12.43 प्रतिशत नीचे हैं स्वीकृत किया जाता है। आपकी उद्धृत गणना से लाई रकम पर 18 फीसदी जी.एस.टी. (यानि 9 फीसदी CGST और 9 फीसदी SGST) राशि का वैध टैक्स चालान का जमा करने पर भुगतान किया जाएगा।

Your e-tender for the work mentioned above is hereby accepted on the behalf of the Chairman, Airports Authority of India at your quoted rate amounting to **Rs. 65,80,746/-** (Rupees Sixty Five Lakhs eighty thousand seven hundred forty-six only) (excluding GST). Your bid quote is 12.43 per cent below the estimate cost put to

1 of 4


tender of **Rs. 75,14,860/-**-(Rupees Seventy five lakhs fourteen thousand eight hundred sixty only) . The GST at 18 per cent (i.e. 9 per cent CGST plus 9 per cent SGST) will be paid over and above the amount calculated on your quoted rate on submission of valid tax invoice.

2. संयुक्त महाप्रबंधक (अभियांत्रिकी-सिविल), भा.वि.प्रा. श्रीनगर अन्तराष्ट्रीय हवाईअड्डे, श्रीनगर कार्य के अभियंता प्रभारी होंगे। आपसे अनुरोध है कि आप अपने मान्यता प्राप्त प्रतिनिधि को प्रतिनियुक्त करें, जो आपकी ओर से अनुबंध समझौते पर हस्ताक्षर करने के लिए अधिकृत हो जो वह दिनांक 18.02.2023 तक संयुक्त महाप्रबंधक (अभियांत्रिकी-सिविल), भा.वि.प्रा. श्रीनगर अन्तराष्ट्रीय हवाईअड्डे, श्रीनगर कार्यालय में उपस्थित हो और करारनामे को पूरा करें। अनुबंध 100/- रुपये के गैर-न्यायिक स्टाम्प पेपर पर निष्पादित किया जाएगा और स्टाम्प पेपर की लागत आपके द्वारा वहन की जाएगी।

Jt. Gen. Manager (Engg-Civil), AAI Srinagar International Airport, Srinagar shall be Engineer-In-Charge of the work. You are requested to depute your accredited representative, empowered to sign the contract agreement on your behalf, to attend the O/o. Jt. Gen. Manager (Engg-Civil), AAI, Srinagar International Airport, Srinagar by 18.02.2023 to sign and complete the agreement. The contract agreement shall be executed on a non-judicial stamp paper of value Rs.100/- and the cost of the stamp paper shall be borne by you.

3. आपकी निविदा के साथ प्राप्त बयाना राशि रु.1,50,297/- को निविदा अनुबंध दस्तावेज के पृष्ठ 17 पर शर्त 1 (ए) के अनुसार सुरक्षा जमा के हिस्से के रूप में परिवर्तित कर दिया गया है। कृपया इस पत्र के जारी होने की तारीख से 15 दिनों के भीतर सुरक्षा जमा के रूप में रु. 5,07,778/- से बकाया राशि जमा करें, ऐसा न करने पर अनुबंध के पृष्ठ 17 पर शर्त 1 (ए) के अनुसार आपके चालू बिल से कटौती की जाएगी।

The earnest money amount of **Rs.1,50,297/-**received along with your tender has been converted as part of security deposit as per condition 1 (A) on page 17 of tender contract document. Please deposit balance of **Rs.5,07,778/-** towards security deposit within 15 days from the date of issue of this letter, failing which the same will be deducted from your running bill as per condition 1 (A) on page 17 of the contract document.


09.02.23
JGM ECI


4. आपसे निवेदन है कि, आप केन्द्रीय एवं राज्य सरकारों के 1970 अधिनियम अनुबंध श्रम नियम तथा 1971 के केन्द्रीय नियम एवं केंद्र तथा राज्य सरकार (नियमन तथा उन्मूलन) के न्यूनतम वेतन अधिनियम, बाल श्रम अधिनियम (निषेध और विनियमन) 1986 निर्माण श्रमिक (रोजगार और सेवा की शर्त का विनियमन) अधिनियम 1996 भवन और अन्य निर्माण श्रमिक कल्याण उपकार अधिनियम 1996 जैसा कि निविदा के जीसीसी के पृष्ठ संख्या 50-51 पर खंड 19बी में केंद्र और राज्य सरकार के नियम के अनुसार निर्दिष्ट है।

You are requested to comply with the provision of contract labour (Regulation & Abolition) Act of 1970 and contract labour (Regulation & Abolition) central rules 1971 Child Labour (Prohibition & Regulation) Act 1986, Construction Workers (Regulation of Employment and Condition of Service) Act 1996, Building and other construction Workers Welfare Cess Act 1996 as specified in Clause 19B on page no. 50-51 of GCC of tender and rules of Central and State Government.

5. आपको निर्देश दिया जाता है कि आप सहायक महाप्रबन्धक (सिविल-अभि)-II, भा .प्रा.वि. श्रीनगर अन्तर्राष्ट्रीय हवाईअड्डे, श्रीनगर से तुरंत संपर्क करें। वह आपको साइट सौंपने की व्यवस्था करेंगे और कार्य के निष्पादन और निगरानी के लिए अपेक्षित दिशानिर्देश जारी करने के लिए अधिकृत है।- कृपया ध्यान दें कि काम करने के लिए अनुमति देने का समय पाँच महीने है जिसे इस पत्र जारी करने के बाद दसवे दिन या वास्तविक कार्य चालू करने पर, इनमे से जो भी पहले हो वह गिना जाएगा।

You are also directed to contact Asst. Gen. Manager (Engg-Civil)-II, AAI, Srinagar International Airport, Srinagar immediately who will arrange to hand over the site to you and is authorized for issuing requisite directions for executing and monitoring the work. Please note that the time allowed for carrying out the work is 05 (Five) Months which shall be reckoned from the 10th day after the date of issue of this letter or the day of actual start of work whichever is earlier.

6. अनुबंध दस्तावेज़ के पृष्ठ संख्या 48 और 49 पर खंड संख्या 17 में उल्लिखित दोष देयता अवधि बारह महीने है।


09.02.23
04m@

The defects liability period as mentioned in clause No. 17 on page no.48 & 49 of the contract document is Twelve Months.

7. इस ठेके के सम्बंध में आगे कोई भी पत्राचार संयुक्त महाप्रबंधक (अभियांत्रिकी-सिविल), भा.वि.प्रा. श्रीनगर अन्तराष्ट्रीय हवाईअड्डे, श्रीनगर के पते पर संदर्भ AAI/SRN/Engg (C)/D&D1-II/2022-23/से करें।

Any further correspondence in connection with the contract should be addressed to the Jt. Gen. Manager (Engg-Civil), Srinagar International Airport, Srinagar and the reference number for this work is AAI/SRN/Engg (C)/D &D1-II/2022-23/.

8. कृपया इस पत्र की प्रतिलिपि स्वीकृति का एक टोकन के रूप में हस्ताक्षर कर अधोहस्ताक्षरी को वापिस करें।


Please acknowledge the receipt and return the copy of this letter enclosed herewith after signing it to the undersigned as a token of acceptance.

9. उपरोक्त के हिंदी पाठ में कोई अन्तर या द्विअर्थक होने कि स्थिति में अंग्रेजी पाठ मान्य होगा।

In case of difference or ambiguity in Hindi and English version, the English version will prevail.

धन्यवाद/Thanking you,

भवदीय/Yours faithfully,


09.02.23

Encl: Schedule-A (BOQ-1 to BOQ-3)

संयु.महाप्रबन्धक(अभि-सिविल)
Jt. Gen. Manager (Engg-Civil)
कृते तथा ओर से, अध्यक्ष
For and on behalf of chairman,
भारतीय विमानपत्तन प्राधिकरण
Airports Authority of India

SCHEDULE OF QUANTITY (SCHEDULE 'A')

Name of work :- Dismantling and re-construction of existing Taxi way D & D1 portions parallel to cross drainage at Srinagar International Airport Srinagar-2nd Call

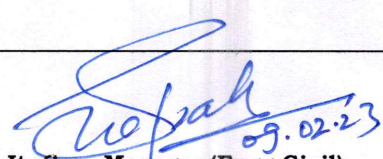
Tender ID: 2022_AAI_139479_1

Item No.	Description of Item	Schedule of Quantity	Unit	Rate per Unit in INR	Amount in Rs.
1.00	Demolishing cement concrete manually/ by mechanical means including disposal of material within 50 metres lead as per direction of Engineer - in - charge. Nominal concrete 1:3:6 or richer mix (i/c equivalent design mix)	420.00	Cum	2070.00	869400.00
2.0	Disposal of building rubbish / malba / similar unserviceable, dismantled or waste materials by mechanical means, including loading, transporting, unloading to approved municipal dumping ground or as approved by Engineer-in-charge, beyond 50 m initial lead, for all leads including all lifts involved.	420.00	Cum	144.00	60480.00
3.0	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:4:8 (1 Cement : 4 coarse sand (zone-III) : 8 graded stone aggregate 40 mm nominal size)	80.00	Cum	6570.00	525600.00
4.0	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	4000.00	kg	93.60	374400.00
5.0	Providing and laying design mix cement concrete of M-30 grade, in roads/ taxi tracks/ runways, using cement content as per design mix, using coarse sand and graded stone aggregate of 40 mm nominal size in appropriate proportions as per approved & specified design criteria, providing dowel bars with sleeve/ tie bars wherever required, laying at site, spreading and compacting mechanically by using needle and surface vibrators, levelling to required slope/ camber, finishing with required texture, including steel form work with sturdy M.S. channel sections, curing, making provision for contraction/ expansion, construction & longitudinal joints (10 mm wide x 50 mm deep) by groove cutting machine, providing and filling joints with approved joint filler and sealants, complete all as per direction of Engineer-in-charge (Item of joint fillers, sealants, dowel bars with sleeve/ tie bars to be paid separately). Note:- Cement content considered in M-30 is @ 340 kg/cum. Excess/ less cement used as per design mix is payable/ recoverable separately	400.00	Cum	10170.00	4068000.00
6.0	Providing and fixing pre-moulded joint filler in expansion joints of RCC roads / CC pavements after making the joints dust free with high pressure air jet cleaners, all complete as per direction of the Engineer-in-Charge. (Pre-moulded joint fillers shall be made of bitumen hot sealing compound impregnated fibre board having impregnation more than 35%, conforming to IS:1838 for fibre board and IS: 1834 for hot sealing bitumen compound grade A.)	9800.00	per cm depth per cm width per m length	4.50	44100.00

[Signature]
Page 1 of 3
109.23-23
14M0

Item No.	Description of Item	Schedule of Quantity	Unit	Rate per Unit in INR	Amount in Rs.
7.0	Painting runway/taxi track/apron marking with adequate nos of coats to give uniform finish with road marking paint superior make as approved by the Engineer-in-charge, i/c cleaning the surface of ail irt, scales, oil, grease and other foreign material etc. and lining out complete. New work (Two or more coats)	50.00	sqm	180.00	9000.00
8.0	Add for using extra cement in the items of design mix over and above the specified cement content therein	250.00	Quintal	1260.00	315000.00
9.0	Providing & filling with polysulphide joint sealing compound (confirming to grade BS: 5212, Part-I, 1990) of approved make Dr. Fixit or equivalent in dummy/construction joints including painting the sides of slab with approved primer and filling the groove 10mm width x 10mm deep including inserting the backer rod of Supreme or equivalent of dia 12mm of approved make to receive the specified sealing compound, providing and applying bond braking tape on top edges of joint to prevent accidental spillage of sealant on top surface and to give a neat finish to the sealant has been applied and tooled, all complete as per specification and direction of EIC.	175.00	Meter	63.00	11025.00
10.0	Providing & filing with polysulphide joint sealing compound (confirming to grade BS:5212, Part-I, 1990) of Dr. Fixit or equivalent in expansion joints including painting the side of slab with approved primer and filling the groove 25 mm width x 10mm deep including inserting the backer rod of Supreme or equivalent of 30mm dia of approved make to receive the specified sealing compound, providing and applying bond breaking tape on top edges of joint to prevent accidental spillage of sealant on top surface and to give a neat finish to the sealant has been applied and tooled, all complete as per specification and direction of EIC.	80.00	Meter	108.00	8640.00
11.0	Cleaning of existing expansion joints and providing & filing with polysulphide joint sealing compound (confirming to grade BS:5212, Part-I, 1990) of Dr. Fixit or equivalent including painting the side of slab with approved primer and filling the groove 20 mm width x 25mm deep including inserting the backer rod of Supreme or equivalent of 30mm dia of approved make to receive the specified sealing compound, providing and applying bond breaking tape on top edges of joint to prevent accidental spillage of sealant on top surface and to give a neat finish to the sealant has been applied and tooled, all complete as per specification and direction of EIC.	960.00	Meter	27.00	25920.00
12.0	Cleaning of existing dummy/construction joints and providing & filling with polysulphide joint sealing compound (confirming to grade BS: 5212, Part-I, 1990) of approved make Dr. Fixit or equivalent including painting the sides of slab with approved primer and filling the groove 10mm width x 10mm deep including inserting the backer rod of Supreme or equivalent of 12mm dia of approved make to receive the specified sealing compound, providing and applying bond braking tape on top edges of joint to prevent accidental spillage of sealant on top surface and to give a neat finish to the sealant has been applied and tooled, all complete as per specification and direction of EIC.	410.00	Meter	36.00	14760.00

Item No.	Description of Item	Schedule of Quantity	Unit	Rate per Unit in INR	Amount in Rs.
13.0	Supplying of packed Elastomeric concrete compound (Flex-O-Patch of choksey chemicals/Delpatch of D.S Brown or equivalent) at site. The one pack of 10 kg Elastomeric concrete shall consist of 3 kg hardner 1.5 kg base & 5.5 kg of snad & fibre powder.	100.00	kg	630.00	63000.00
14.0	Supplying of primer (RDL-942 of Choksey Chemicals / 105 of D.S Brown or equivalent) for Elastomeric concrete compound at site.	3.00	Ltr	207.00	621.00
15.0	Repairing of damaged portion of rigid pavement with Elastomeric concrete compound (Flex-O-Patch of Choksey chemicals/ Delpatch of D.S Brown or equivalent) including primer after marking, cutting, chipping the pavement up to required size by using mechanical cutters, side locking on the vertical face, cleaning the prepared area , masking and pouring the compound, finishing & texturing complete as per manufacturer specifications and the direction of EIC with required machines & tools. Note: The rate quoted shall be exclusive of cost of material	100.00	kg	900.00	90000.00
16.0	Providing and laying 400 micron thick polythene sheet cnforming to IS 2508 anti-friction layer on the base course with 6mm thick fine sand layer, complete as per the direction of EIC (Only plan area is to be measured for payment).	800.00	Sqm	126.00	100800.00
Total					Rs. 6580746.00
(Rupees Sixty Five Lakhs eighty thousand seven hundred forty six only)					


Jt. Gen. Manager (Engg-Civil)
Srinagar International Airport
Airports Authority of India

Signature Not Verified

Digitally signed by SIMERDEEP SINGH
Date: 2023.02.14 14:02:32 IST
Location: eProcurement System for Central PSUs