



भारतीय विमानपत्तन प्राधिकरण
AIRPORTS AUTHORITY OF INDIA
TRICHY AIRPORT



No: AAI/SR/TRY/PROJ/HORTICULTURE/WO/2023-24/3228(a)

Date: 02.06.2023

To

M/s. AGRISENSE LANDSCAPE,
B-160, Saraswati enclave, Gurugram,
Haryana - 122002.

Name of Work: Up-gradation of passenger Terminal Building and airside facilities at Tiruchirappalli (Trichy) International Airport.
S.H: Development and All-Inclusive comprehensive maintenance contract (AICMC) of Horticulture, Landscaping works for New Integrated passenger Terminal Building at Tiruchirappalli International airport, Trichy.

Ref: Your e-tender (Financial Bid) opened through CPP portal on 26.05.2023.

Dear Sir(s),

1. Your e-tender for the work mentioned above is hereby accepted on behalf of Honourable Chairman, Airports Authority of India, at the item rates quoted by you totalling to **Rs.4,12,31,041/- (Rupees Four Crores Twelve Lakhs Thirty one Thousand and Forty one only) (exclusive of GST)** which is 26.35% below the estimated cost put to tender of Rs.5,59,81,000/- (Rupees Five Crores Fifty Nine Lakhs and Eighty one Thousand only) exclusive of GST.

2. Joint General Manager (Engg-Str/Civil) Project, Airports Authority of India, Trichy International Airport, Trichy – 620007 shall be the Engineer-In-Charge of the work. You are requested to attend the office of Joint General Manager (Engg-Str/Civil) - Project by **25.06.2023** to sign and complete the contract agreement. The contract agreement shall be executed on a non-judicial stamp paper of value Rs.100/- (Rupees One Hundred Only) and the cost of the stamp paper shall be borne by you.

3. The Earnest Money amount of Rs. 6,54,200/- (Rupees Six Lakhs Fifty four Thousand and Two Hundred Only) received along with your Tender. **Please deposit balance Rs.14,07,352/- (Rupees Fourteen Lakhs Seven Thousand Three Hundred and Fifty Two Only)** towards security deposit **within 10 days** from the date of issue of this letter, failing which, the same will be deducted as per condition of Clause 1 A of Contract on Page No.73 of Tender document.

4. Within **30 days** of issue of acceptance letter, you shall submit to AAI, a **performance Guarantee** as per Clause 1 of contract agreement for an amount of **Rs.20,61,552/- (Rupees Twenty Lakhs Sixty One Thousand Five Hundred and Fifty Two only)**.

[Handwritten signature and date]
02/06/2023




भारतीय विमानपत्तन प्राधिकरण
AIRPORTS AUTHORITY OF INDIA
TRICHY AIRPORT



P-2

5. You are requested to comply with the provisions of Contract Labour (Regulation and Abolition) Act 1970 and Contract Labour (Regulation and Abolition) central rules 1971, Child labour (Prohibition & Regulation) Act 1986, Construction workers (Regulation of Employment and Conditions of Service) Act 1996, Building and other Construction Workers Welfare cess Act 1996 as specified in GCC **clause 19 at page-107** of Tender document and rules of Central and State Governments.
6. You are also directed to contact Joint General Manager (Engg- Str/Civil)- Project, Airports Authority of India, Trichy International Airport, Trichy- 620 007 immediately who will arrange to handover the site to you.
7. Please note that the time allowed for carrying out the work shall be only **05 (Five) months** for development/construction and same shall be reckoned from the **10th day** of issue of this letter and **05 (Five) years** AICMC there after.
8. Any further correspondence in connection with contract should normally be addressed to the Engineer-In-Charge.
9. Please acknowledge the receipt and return the duplicate copy of this letter enclosed herewith after signing it to the undersigned as a token of acceptance.

Yours faithfully,


(B Selvakumar),

GM (Engg – Civil) Project,
AAI, Trichy Airport.

बी. सेल्वकुमार B. SELVAKUMAR
महा प्रदंक्क इंजी
General Manager Engg.
AAI, Trichy Airport - 620 007

Encl: BoQ (7 Pages).

NOO: For Information please

1. ED-Engg SR, AAI, Rajiv Gandhi Bhavan, Safdarjung Airport, New Delhi-110003.
2. PS to RED- SR, AAI, Operational Office complex, Chennai International Airport, Chennai-600027
3. Jt.GM (E-C) - Project, AAI, Trichy Airport.
4. Jt. GM (E-E), AAI, Trichy Airport.
5. DGM (F&A), AAI, Trichy Airport.
6. AGM (E-C), AAI, Trichy Airport

NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
3	Digging holes in ordinary soil and refilling the same with the excavated earth mixed with manure or sludge in the ratio of 2:1 by volume (2 parts of stacked volume of earth after reduction by 20% : 1 part of stacked volume of manure after reduction by 8%) including planting the tree, flooding with water, dressing including removal of rubbish and surplus earth, if any, with all leads and lifts (cost of tree, sludge, manure, extra good earth if needed, mixing charges and spreading charges shall be paid separately under respective items) Holes 120 cm dia , and 120 cm deep - For Trees	1310.00	each	100.00	131000.00	INR One Lakh Thirty One Thousand Only
4	Digging holes in ordinary soil and refilling the same with the excavated earth mixed with manure or sludge in the ratio of 2:1 by volume (2 parts of stacked volume of earth after reduction by 20% : 1 part of stacked volume of manure after reduction by 8%) including planting the shrub, flooding with water, dressing including removal of rubbish and surplus earth, if any, with all leads and lifts (cost of shrubs, sludge, manure, extra good earth if needed, mixing charges and spreading charges shall be paid separately under respective items) Holes 60 cm dia , and 60 cm deep - For Shrubs	60246.00	each	25.00	1506150.00	INR Fifteen Lakh Six Thousand One Hundred & Fifty Only
5	Supplying and stacking of good earth at site wherever required inside airport premises including royalty and carriage complete as per the directions of Engineer-In-Charge (earth measured in stacks will be reduced by 20% for payment).	7000.00	Cum	350.00	2450000.00	INR Twenty Four Lakh Fifty Thousand Only
6	Supplying and stacking sludge at site wherever required inside airport premises including royalty and carriage complete as per the directions of Engineer-In-Charge (sludge measured in stacks will be reduced by 8% for payment).	500.00	Cum	500.00	250000.00	INR Two Lakh Fifty Thousand Only
7	Supplying and stacking of well decayed cattle manure at site wherever required inside airport premises including royalty and carriage complete as per the directions of Engineer-In-Charge (Cattle manure measured in stacks will reduced by 8% for Payment).	500.00	Cum	500.00	250000.00	INR Two Lakh Fifty Thousand Only
8	Supplying and spreading including mixing, if any, fertilizer & pesticides at site of work DAP as per the directions of Engineer-In-Charge.	5685.00	Kg.	20.00	113700.00	INR One Lakh Thirteen Thousand Seven Hundred Only
9	Supplying chemical emulsion in sealed containers including delivery as specified. Chlorpyriphos/ Lindane emulsifiable concentrate of 20% as per the directions of Engineer-In-Charge	300.00	Ltrs.	100.00	30000.00	INR Thirty Thousand Only
10	Mixing earth and sludge or manure in the required proportion specified or directed by the Engineer-in-charge (cost of sludge, dump manure and/ or good earth to be paid separately).	14000.00	Cum	5.00	70000.00	INR Seventy Thousand Only
11	Spreading of sludge, dump manure and/or good earth in required thickness as per direction of Engineer-in-charge (cost of sludge, dump manure and/ or good earth to be paid separately).	14000.00	Cum	5.00	70000.00	INR Seventy Thousand Only

Item Rate BoQ

Tender Inviting Authority: Assistant General Manager (Engg-Civil), AAI, Trichy International Airport, Trichy - 620 007.

Name of Work: Up-gradation of passenger Terminal Building and airside facilities at Tiruchirappalli (Trichy) International Airport.

SH: Development and All-Inclusive comprehensive maintenance contract (AICMC) of Horticulture, Landscaping works for new integrated passenger terminal building at Tiruchirappalli international airport, Trichy.

Tender Ref No: AAI/TRY/PROJ/HORTICULTURE/2023 ; Tender ID: 2023_AAI_152704_1

Name of the Bidder/ Bidding Firm / Company :	AGRISENSE LANDSCAPE					
PRICE SCHEDULE (This BOQ template must not be modified/replaced by the bidder and the same should be uploaded after filling the relevent columns, else the bidder is liable to be rejected for this tender. Bidders are allowed to enter the Bidder Name and Values only)						
NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
1	Trenching in ordinary soil up to a depth of 60 cm including removal and stacking of serviceable materials and then disposing of surplus soil, by spreading and neatly levelling within airport premises and making up the trenched area to proper levels by filling with earth or earth mixed with sludge or/ and manure before and after flooding trench with water. (excluding cost of imported earth, mixing of earth, sludge, manure, spreading).	24900.00	Cum	50.00	1245000.00	INR Twelve Lakh Forty Five Thousand Only
2	Preparation of beds for ground covers, hedging and shrubbery by excavating 60 cm deep and trenching the excavated base to a further depth of 30 cm, refilling the excavated earth after breaking clods and mixing with sludge or manure in the ratio of 8:1 (8 parts of stacked volume of earth after reduction by 20%: one part of stacked volume of sludge or manure after reduction by 8%), including planting, flooding with water, filling with earth if necessary, watering and finally fine dressing, leveling etc. including stacking and disposal of materials declared unserviceable and surplus earth by spreading and leveling as directed, within airport premises, lift up to 1.5 m complete as per the directions of Engineer-In -Charge. (cost of plants/ ground covers, sludge, manure, extra good earth if needed, mixing charges and spreading charges shall be paid separately under respective items)	2973.00	Cum	20.00	59460.00	INR Fifty Nine Thousand Four Hundred & Sixty Only

[Signature]
02/06/2023


NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
22	Providing and stacking well developed Tabebuia Rosea having height of 6-8ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	17.00	Each	800.00	13600.00	INR Thirteen Thousand Six Hundred Only
23	Providing and stacking well developed Peltorum Ferrugineum having height of 6-8ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	227.00	Each	1000.00	227000.00	INR Two Lakh Twenty Seven Thousand Only
24	Providing and stacking well developed Cassia Fistula having height of 10-12ft stright and sturdy branches in big poly bag well as per the directions of Engineer-In-Charge.	181.00	Each	1000.00	181000.00	INR One Lakh Eighty One Thousand Only
25	Providing and stacking well developed Erythrina Indica having height of 10-12ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	10.00	Each	1000.00	10000.00	INR Ten Thousand Only
26	Providing and stacking well developed Saraca Asoca having height of 8-10ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	78.00	Each	1000.00	78000.00	INR Seventy Eight Thousand Only
27	Providing and stacking well developed Ficus Retusa having height of 4-5ft stright and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	30.00	Each	1000.00	30000.00	INR Thirty Thousand Only
28	Providing and stacking well developed Lagerstroemia Indica height of plants 90-100 cm in big size polybag as per the directions of Engineer-In-Charge.	43.00	Each	400.00	17200.00	INR Seventeen Thousand Two Hundred Only
29	Providing and stacking well developed Casuarina equisetifolia having height of 8-10ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	42.00	Each	1000.00	42000.00	INR Forty Two Thousand Only
30	Providing and stacking Washingtonia Robusta (Stem height 1.8m) well developed in big polybag as per the directions of Engineer-In-Charge.	179.00	Each	3000.00	537000.00	INR Five Lakh Thirty Seven Thousand Only
31	Providing and stacking Roystonea Regia (Stem height 2.5m) well developed in big polybag as per the directions of Engineer-In-Charge.	158.00	Each	1000.00	158000.00	INR One Lakh Fifty Eight Thousand Only
32	Providing and stacking Pheonix dactylifera (Stem height 1.5m) well developed in big polybag as per the directions of Engineer-In-Charge.	29.00	Each	2500.00	72500.00	INR Seventy Two Thousand Five Hundred Only
33	Providing and stacking Rhaps excelsa (Stem height 0.6m) well developed in big polybag as per the directions of Engineer-In-Charge.	12.00	Each	1000.00	12000.00	INR Twelve Thousand Only
34	Providing and stacking Cyrtostachys Renda (Stem height 1m) well developed in big polybag as per the directions of Engineer-In-Charge.	23.00	Each	700.00	16100.00	INR Sixteen Thousand One Hundred Only
35	Providing and stacking Washingtonia filifera (Stem height 2m) well developed in big polybag as per the directions of Engineer-In-Charge.	62.00	Each	3500.00	217000.00	INR Two Lakh Seventeen Thousand Only
36	Providing and stacking Hyophorbe lagenicaulis (Stem height 1m) well developed in big polybag as per the directions of Engineer-In-Charge.	42.00	Each	1000.00	42000.00	INR Forty Two Thousand Only

NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
12	Rough dressing the trenched ground including breaking of clods as per the directions of Engineer-In-Charge.	41500.00	Sqm	10.00	415000.00	INR Four Lakh Fifteen Thousand Only
13	Flooding the ground with water including making Kiaries and dismantling the same as per the directions of Engineer-In-Charge	41500.00	Sqm	3.00	124500.00	INR One Lakh Twenty Four Thousand Five Hundred Only
14	Uprooting weeds from the trenched area after 10 to 15 days of its flooding with water including disposal of uprooted vegetation as per the directions of Engineer-In-Charge.	41500.00	Sqm	5.00	207500.00	INR Two Lakh Seven Thousand Five Hundred Only
15	Fine dressing the ground as per the directions of Engineer-In-Charge	41500.00	Sqm	5.00	207500.00	INR Two Lakh Seven Thousand Five Hundred Only
16	Providing & laying Selection no. 1 grass turf with earth 50mm to 60mm thickness of existing ground prepared with proper level and ramming with required tools wooden and than rolling the surface with light roller make the surface smoothen and light watering the same and maintenance for 30 days or more till the grass establish properly, as per direction of the Engineer-in-charge	41500.00	Sqm	100.00	4150000.00	INR Forty One Lakh Fifty Thousand Only
17	Providing and fixing M. S. tree guard 45 cm square in plan, height 1.20 metre above ground level and 0.40 metre below ground level. The vertical members shall consist of four nos. angle iron of size 25x25x3 mm, 1.6m long, one at each corner and 8 nos flat iron of size 25x3 mm, 1.2 m long. The vertical members shall be welded to 4 nos. 25x6 mm M. S. flats placed horizontally around the vertical member of the cage. One name plate of 1 mm thick M.S. sheet of size 250x100 mm shall be welded to the tree guard near the middle height and lettered with approved name. The tree guard shall be fixed to the ground by making suitable holes and by embedding four corners leg in the ground, including refilling the earth, compaction etc. complete. The tree guard shall be painted with two or more coats of synthetic enamel paint of approved brand and manufacture over a coat of primer, complete in all respect.	200.00	each	1000.00	200000.00	INR Two Lakh Only
18	Anti termite treatment of lawn area through premise 30.50% I P. one liter premise diluted in 499 liters water and applying solution @ 1.00 litre solution per sqm lawn or bed area.(two application) i/c cost of chemical)and as per direction of Engineer-in-charge.	41500.00	Sqm	3.00	124500.00	INR One Lakh Twenty Four Thousand Five Hundred Only
19	Providing and wartering of irrigation water through water tanker of Horticulture features i.e. lawn, tree, shrubs, hedge/edge, ground cover etc. at the site of work. Water tanker having 5000 lit. capacity with one labour for watering i/c cost of water, filling of tanker, wartering at site with all leads and lifts as per direction of Engineer-in-charge.	450.00	per water tanker	750.00	337500.00	INR Three Lakh Thirty Seven Thousand Five Hundred Only
20	Providing and stacking well developed Delonix regia having height of 10-12ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	119.00	Each	1100.00	130900.00	INR One Lakh Thirty Thousand Nine Hundred Only
21	Providing and stacking well developed Tabebuia Argentea having height of 6-8ft straight and sturdy branches in big poly bag as per the directions of Engineer-In-Charge.	58.00	Each	800.00	46400.00	INR Forty Six Thousand Four Hundred Only



NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
52	Providing and stacking Tabemaemontana Coronaria Dwarf Well developed of height 30-45 cm in polybag as per the directions of Engineer-In-Charge.	2330.00	Each	150.00	349500.00	INR Three Lakh Forty Nine Thousand Five Hundred Only
53	Providing and stacking Wedelia Trilobata well developed of height 15-20 cm in polybag (16 Nos./sqmt) as per the directions of Engineer-In-Charge.	1426.00	sqm	150.00	213900.00	INR Two Lakh Thirteen Thousand Nine Hundred Only
54	Providing and stacking Alpinia variegata height of plants 30-45 cm in poly bag. (14 Nos./sqmt) as per the directions of Engineer-In-Charge.	1858.00	sqm	150.00	278700.00	INR Two Lakh Seventy Eight Thousand Seven Hundred Only
55	Providing and stacking Iresine Herbestii well developed of height 15-30 cm in poly bag of size 20 cm (16 Nos./sqmt) as per the directions of Engineer-In-Charge.	1300.00	sqm	150.00	195000.00	INR One Lakh Ninety Five Thousand Only
56	Providing and stacking Dianella cassa blue well developed of height 20-25 cm in polybag (16 Nos./sqmt) as per the directions of Engineer-In-Charge.	370.00	sqm	180.00	66600.00	INR Sixty Six Thousand Six Hundred Only
57	Supplying and stacking of organic manure/ vermicompost (meeting the relevant standards/ specifications for better plant growth) at site wherever required inside airport premises including royalty, carriage, all other charges, etc complete as per the directions of Engineer-In-Charge	300.00	tonnes	4000.00	1200000.00	INR Twelve Lakh Only
58	Complete maintenance of garden with entire garden features in the garden area i.e lawn, trees, palm trees, shrubs, ground covers, hedge etc and removal of all weeds, watering, mowing of lawn, cattle chasing, watch and ward, pruning of trees/shrubs, clipping of hedge/edge top dressing of in garden area with good earth & manure once/twice in a year, application of chemical fertilizer etc as and when required nothing extra shall be paid on this account and all the above operation done every month during maintenance period are as per direction of Engineer in charge including cattle chasing/ watch and ward. Maintenance Period for 60 months. Cutting of designer hedge/edge removing of cut materials, cleaning, hoeing of hedge/edge bed watering manuring and applying insecticides and fungicides etc. Topiary cutting/shaping of trees removing of cut materials, cleaning. Complete maintenance of the entire garden feature in the garden area i.e. lawn, trees, shrubs, hedge, flower beds, creepers etc. including hoeing, pruning, replacement of unhealthy plants and trees, gap filling, watering, mowing of lawn, clipping of hedge, removal of garden waste, applying insecticide, pesticide & fertilizer (whenever required) top dressing of lawn in equal levels and good earth filling to be done where ever required in the damaged/replacing lawn with good earth and manure and maintenance of other garden related works as directed by Engineer -in-charge. (Note:-The quoted rate is inclusive of cost of Manpower, Good earth, manure, fertilizer, organic manure/ vermicompost, insecticides and pesticides,DAP, etc. & All T&P articles & stock materials etc.) Weeding out of lawn by removal of all weeds and other wild growth with roots by forking including disposal of garden rubbish with all lead and lifts complete as per direction and satisfaction of Engineer in charge of the work without top dressing. Cutting of Hedge/Edge including removing of cut material along with removal of rubbish for all lead within the airport premises and all lift as per direction of Engineer incharge (Including the cost of material). Maintenance of all lawns, trees, palm trees, shrubs, hedge, ground covers, etc developed/constructed in main contract as directed by Engineer-In-Charge. a) For First year of AICMC	557448.00	Per sqm Per month	6.50	3623412.00	INR Thirty Six Lakh Twenty Three Thousand Four Hundred & Twelve Only

NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
SI. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
37	Providing and stacking Barleria Cristata Well developed of height 30-45 cm in polybag as per the directions of Engineer-In-Charge.	480.00	Each	200.00	96000.00	INR Ninety Six Thousand Only
38	Providing and stacking Galphimia Glauca Well developed of height 30-45 cm in polybag as per the directions of Engineer-In-Charge.	6258.00	Each	150.00	938700.00	INR Nine Lakh Thirty Eight Thousand Seven Hundred Only
39	Providing and stacking Hamelia Patens Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	800.00	Each	150.00	120000.00	INR One Lakh Twenty Thousand Only
40	Providing and stacking Beloperone Guttata Well developed of height 30-45 cm in polybag as per the directions of Engineer-In-Charge.	1840.00	Each	150.00	276000.00	INR Two Lakh Seventy Six Thousand Only
41	Providing and stacking Ficus Panda Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	5172.00	Each	150.00	775800.00	INR Seven Lakh Seventy Five Thousand Eight Hundred Only
42	Providing and stacking Pennisetum Alba Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	4935.00	Each	250.00	1233750.00	INR Twelve Lakh Thirty Three Thousand Seven Hundred & Fifty Only
43	Providing and stacking Pennisetum Rubram Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	5595.00	Each	250.00	1398750.00	INR Thirteen Lakh Ninety Eight Thousand Seven Hundred & Fifty Only
44	Providing and stacking Ficus Longisland Well developed of height 30-45 cm in polybag as per the directions of Engineer-In-Charge.	3250.00	Each	150.00	487500.00	INR Four Lakh Eighty Seven Thousand Five Hundred Only
45	Providing and stacking Hymenocaulis Litt. Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	7271.00	Each	175.00	1272425.00	INR Twelve Lakh Seventy Two Thousand Four Hundred & Twenty Five Only
46	Providing and stacking Tradescantia Pallida Well developed of height 15-20 cm in polybag as per the directions of Engineer-In-Charge.	3600.00	Each	150.00	540000.00	INR Five Lakh Forty Thousand Only
47	Providing and stacking Acalypha Wilksiana Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	3450.00	Each	175.00	603750.00	INR Six Lakh Three Thousand Seven Hundred & Fifty Only
48	Providing and stacking Bougainvillea Buttiana Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	480.00	Each	150.00	72000.00	INR Seventy Two Thousand Only
49	Providing and stacking Canna Indica Red Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	2275.00	Each	150.00	341250.00	INR Three Lakh Forty One Thousand Two Hundred & Fifty Only
50	Providing and stacking Duranta Goldeana Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	9600.00	Each	100.00	960000.00	INR Nine Lakh Sixty Thousand Only
51	Providing and stacking IXORA Chinensis Well developed of height 45-60 cm in polybag as per the directions of Engineer-In-Charge.	2910.00	Each	100.00	291000.00	INR Two Lakh Ninety One Thousand Only

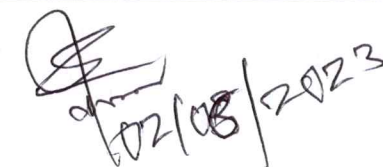

NUMBER #	TEXT #	NUMBER #	TEXT #	NUMBER #	NUMBER #	TEXT #
Sl. No.	Item Description	Quantity	Units	RATE Excluding GST In Figures To be entered by the Bidder Rs. P	TOTAL AMOUNT WITHOUT GST	TOTAL AMOUNT In Words
1	2	3	4	5	6	7
59	b) For Second year of AICMC	557448.00	Per sqm Per month	6.00	3344688.00	INR Thirty Three Lakh Forty Four Thousand Six Hundred & Eighty Eight Only
60	c) For Third year of AICMC	557448.00	Per sqm Per month	5.75	3205326.00	INR Thirty Two Lakh Five Thousand Three Hundred & Twenty Six Only
61	d) For Fourth year of AICMC	557448.00	Per sqm Per month	5.50	3065964.00	INR Thirty Lakh Sixty Five Thousand Nine Hundred & Sixty Four Only
62	e) For Fifth year of AICMC	557448.00	Per sqm Per month	4.50	2508516.00	INR Twenty Five Lakh Eight Thousand Five Hundred & Sixteen Only
Total in Figures					41231041.00	INR Four Crore Twelve Lakh Thirty One Thousand & Forty One Only
Quoted Rate in Words		INR Four Crore Twelve Lakh Thirty One Thousand & Forty One Only				


 02/06/2023
 बो. सत्वकुमार B. SELVAKUMAR
 महा प्रदंक्क इंजी
 General Manager Engg.
 AAI, Trichy Airport - 620 007