

संदर्भ सं: AAICLAS/बि.बि.एस.आर/ कार्गो शौचालय / W.O- 02 /2024-25/ 112

Ref: AAICLAS/BBSR/ Cargo Toilet W.O-02 /2024-25/

दिनांक: 28.02.2025

Date: 28.02.2025

सेवा में/To,

मेसर्स प्रसन्त कुमार बेउरिया/ M/s. Prasanta Kumar Beuria,
प्लॉट नं: 169, हाउस नं: 1680/ Plot No. 169, House No.- 1680,
नुयपटना, प.ओ: बंगुयारी/ Nuapatana, P.O- Banguari,
प.एस: बलियान्त, खुर्दा/ P.S. Baliana, Dist: Khurda.

विषय: बी.पी.आई हवाई अड्डे, भुवनेश्वर पर शौचालय और संबद्ध सिविल कार्य AAICLAS कार्गो, टर्मिनल का

निर्माण ।

Sub: Construction of Toilet and allied Civil Capital Works AAICLAS Cargo, Terminal at B.P.I. Airport, Bhubaneswar.

संदर्भ: आपकी ई-निविदा दिनांक 27.01.2025 (टेंडर आइडि: 2024_AAI_221337_1)।

Ref. : Your e-Tender opened on 27.01.2025 (Tender ID: 2024_AAI_221337_1).

महोदय / Sir (s),

1. उपरोक्त कार्य के लिए आपका ई-निविदा सीईओ, एएआईसीएलएस की ओर से आप के द्वारा उद्धृत मद दर जिसकी कुल राशि रु. 21,74,025.00 (जीएसटी अतिरिक्त) जो कि निविदा की लागत रु. 39,78,900.00 से 45.36% कम है, स्वीकृत किया जाता है।

Your E-Tender for the work mentioned above is hereby accepted on behalf of CEO, AAICLAS, at the item rates quoted by you totaling to Rs. 21,74,025.00 (Rupees Twenty-One Lakhs Seventy-Four Thousand Twenty-Five only) (GST extra) which is 45.36 % below the estimated cost put to tender of Rs. 39,78,900.00.

2. सहायक महा प्रबंधक (अभि.-सिविल), भारतीय विमानपत्तन प्राधिकरण, बि.पि.आई. हवाई अड्डा, भुवनेश्वर इस कार्य के इंजीनियर प्रभारी होंगे। आपसे अनुरोध है कि आप संविदा करार पर हस्ताक्षर करने एवं उसे पूरा करने हेतु इस पत्र के जारी किए जाने के 10 (दस) दिनों के भीतर आप अधोहस्ताक्षरी, भारतीय विमानपत्तन प्राधिकरण, बि.पि.आई. हवाई अड्डा के कार्यालय में उपस्थित हों। संविदा करार रु 100/- (सौ रुपये मात्र) के न्यायिकेतर (नॉन ज्युडिशियल) स्टाम्प पेपर पर बनाया जाएगा और स्टाम्प पेपर की लागत आपको वहन करनी होगी।

Asst. General Manager Engg (C), AAI, B.P.I. Airport, Bhubaneswar shall be the Engineer-in-Charge of the work. You are requested to attend office of the undersigned, AAI, B.P.I. Airport within 10 (ten) days from the date of issue of this letter, to sign and complete the contract agreement. The contract agreement shall be executed on a non-judicial stamp paper of value Rs. 100/- (Rupees One Hundred only) and the cost of the stamp paper shall be borne by you.

3. कृपया इस पत्र के जारी होने के 10 दिन में सुरक्षा जमा के लिए रु 2,17,403.00 (दो लाख सत्रह हजार चार सौ तीन रुपये मात्र) जमा करवा दें, ऐसा नहीं करने पर उक्त रकम संविदा दस्तावेज के पृष्ठ 35 पर दी गई शर्त 1A के अनुसार आपके रनिंग बिल से काट ली जाएगी।

Please deposit Rs.2,17,403.00 (Rupees Two Lakh Seventeen Thousand Four Hundred Three only) towards Security Deposit within 10 (Ten) days from the date of issue of this letter, failing which, the same will be deducted as per condition of Clause no. 1A on page 35 of the Contract document.

4. आपसे अनुरोध है कि संविदा श्रमिक (विनियमन एवं समापन) अधिनियम 1970 और संविदा श्रमिक (विनियमन एवं समापन) केन्द्रीय नियमावली 1971, अधिन, केन्द्रीय और राज्य सरकार के न्यूनतम मजदूरी अधिनियम और ई.पी.एफ.एक्ट, 1952 एवं ई. एस. आई. एक्ट नियमों का पालन करें।

You are requested to comply with provision of Contract Labour (Regulation and Abolition) Act of 1970 and contract (Regulation and Abolition) Central rules 1971, Minimum Wages Act & Rules, EPF Act, 1952 and ESI act thereof Central & State Governments.

Contd. in next page



:: 2 ::

5. आपको तत्काल प्रभारी अभियंता (सहायक महाप्रबंधक इंजीनियरिंग (सी), एएआई, बीपीआई एयरपोर्ट, भुवनेश्वर) से संपर्क करने का भी निर्देश दिया जाता है; जो साइट को आपको सौंपने की व्यवस्था करेंगे।
You are also directed to contact the Engineer-in-Charge (the Asst. General Manager Engg (C), AAI, B.P.I. Airport, Bhubaneswar) immediately; who will arrange to hand over the site to you.
6. कृपया यह नोट कर लें कि काम करने का समय 06 (छे) महिना है जिसे इस पत्र के जारी होने की तारीख से 10 दिन बाद या असल कार्य चालु करने की तिथि से जो पहले हो, गिना जाएगा।
Please note that the time allowed for carrying out the work shall be 06 (Six) months and the same shall be reckoned from the 10th day from the issue of this letter or actual date of start whichever is earlier.
7. संविदा के संबंध में आगे किया जाने वाला पत्राचार समान्यतः इंजीनियर प्रभारी से किया जाए।
Any further correspondence in connection with the contract should normally be addressed to the Engineer-in-Charge.
8. कृपया इस पत्र की पावती भेजें तथा साथ में संलग्न इस पत्र की दूसरी प्रति पर स्वीकारोक्ति के रूप विधिवत हस्ताक्षर करके हमें वापस भेजें।
Please acknowledge the receipt and return the duplicate copy of this letter enclosed herewith after duly signing it to the undersigned as a token of acceptance.
9. यदि कोई विसंगति पाई जाती है तो अंग्रेजी भाषा ही मान्य होगी।
In case any discrepancy is found, then English version will be taken as correct.

धन्यवाद/ Thanking you.



भवदीय / Yours faithfully,


28.02.2025

(राहुल रंजन) / Rahul Ranjan
स्टेशन प्रमुख / Station Head

वरिष्ठ प्रबंधक (कार्गो) / Sr. Manager (Cargo)

AAI Cargo Logistics and Allied Services Company Ltd. (AAICLAS)

AAICLAS Air Cargo Terminal

At- भा.वि.प्रा., बि.पि.आई. हवाई अड्डा, भुवनेश्वर

AAI, B.P.I. Airport, Bhubaneswar

संलग्न / Encl: 1. अनुसूची "A" / Schedule "A"
2. फार्म - III और VII / Form- III & VII.

:: 3 ::

प्रतिलिपि / Copy to:
N.O.O.
External:

1. Labour Commissioner (Central), Kendriya Shrama Sadan, Plot No. N-7/6 & 7, IRC Village, Behind ISCON Temple, Nayapalli, Bhubaneswar – 15, Odisha.
2. Commissioner of Income tax (TDS), Ayakar Annex Building, Rajaswa Vihar, Sahid Nagar, Bhubaneswar - 751007.
3. Regional Provident Fund Commissioner, Vabisyanidhi Bhawan, Janpath, Unit IX, Bhubaneswar, Odisha.
4. The Regional Commissioner, Employee State Insurance Corporation, Panchadeep Bhawan, Janpath, Unit IX, Bhubaneswar, Odisha.



[Signature]
28.02.2025

(राहुल रंजन) / Rahul Ranjan
स्टेशन प्रमुख / Station Head

वरिष्ठ प्रबंधक (कार्गो) / Sr. Manager(Cargo)

AAI Cargo Logistics and Allied Services Company Ltd. (AAICLAS)

AAICLAS Air Cargo Terminal

At- भा.वि.प्रा., बि.पि.आई. हवाई अड्डा, भुवनेश्वर
AAI, B.P.I. Airport, Bhubaneswar

Internal:

1. CEO, AAICLAS
2. GM(Cargo)/RM(ER), AAICLAS, Kolkata
3. Airport Director, AAI, B.P.I. Airport, Bhubaneswar.
4. Dy. General Manager (Engg.- Civil), AAI, B.P.I. Airport, Bhubaneswar.
5. Dy. General Manager (Finance), AAI, B.P.I. Airport, Bhubaneswar.
6. Asst. General Manager (Engg.- Civil), AAI, B.P.I. Airport, Bhubaneswar.
7. Manager(Finance), AAICLAS, Kolkata
8. Manager(Finance), AAICLAS, CHQ, New Delhi

[Signature]
28.02.2025

(राहुल रंजन) / Rahul Ranjan
स्टेशन प्रमुख / Station Head

वरिष्ठ प्रबंधक (कार्गो) / Sr. Manager(Cargo)

AAI Cargo Logistics and Allied Services Company Ltd. (AAICLAS)

AAICLAS Air Cargo Terminal

At- भा.वि.प्रा., बि.पि.आई. हवाई अड्डा, भुवनेश्वर
AAI, B.P.I. Airport, Bhubaneswar



AAI CARGO LOGISTICS AND ALLIED SERVICES CO. LTD
AIRPORTS AUTHORITY OF INDIA
B.P.I AIRPORT, BHUBANESWAR
BILL OF QUANTITY

1/2

Name of Work: Construction of Toilet and allied Civil works at AAICLAS Cargo Terminal, B.P.I. Airport, Bhubaneswar.

Sl. No	Description of Work / Item(s)	Qty	Units	Rate	Amount
1	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas (exceeding 30 cm in depth, 1.5 m in width as well as 10 sqm on plan) including getting out and disposal of excavated earth lead upto 50 m and lift upto 1.5 m, as directed by Engineer-in-charge. a) All kinds of soil	10.00	Cum	95.00	950.00
2	Earth work in excavation by mechanical means (Hydraulic excavator) / manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan), including dressing of sides and ramming of bottoms, for all lift, including getting out the excavated soil and disposal of surplus excavated soil as directed, within a lead of 50 m. a) All kinds of soil	15.00	Cum	105.00	1575.00
3	Supplying and filling in plinth with sand under floors, including watering, ramming, consolidating and dressing complete.	85.00	Cum	1080.00	91800.00
4	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:4:8 (1 Cement : 4 coarse sand (zone-III) derived from natural sources : 8 graded stone aggregate 40 mm nominal size derived from natural sources)	40.00	Cum	3700.00	148000.00
5	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering - All work up to plinth level : 1:1.5:3 (1 cement : 1.5 coarse sand (zone-III) derived from natural sources : 3 graded stone aggregate 20 mm nominal size derived from natural sources)	50.00	Cum	5000.00	250000.00
6	Providing and laying in position specified grade of reinforced cement concrete, excluding the cost of centering, shuttering, finishing and reinforcement - All work up to plinth level : 1:1.5:3 (1 cement : 1.5 coarse sand (zone-III) : 3 graded stone aggregate 20 mm nominal size)	10.00	Cum	5500.00	55000.00
7	Reinforced cement concrete work in walls (any thickness), including attached pilasters, buttresses, plinth and string courses, fillets, columns, pillars, piers, abutments, posts and struts etc. above plinth level up to floor five level, excluding cost of centering, shuttering, finishing and reinforcement : 1:1.5:3 (1 cement : 1.5 coarse sand(zone-III) : 3 graded stone aggregate 20 mm nominal size)	1.00	Cum	5000.00	5000.00
8	Reinforced cement concrete work in beams, suspended floors, roofs having slope up to 15° landings, balconies, shelves, chajjas, lintels, bands, plain window sills, staircases and spiral stair cases above plinth level up to floor five level, excluding the cost of centering, shuttering, finishing and reinforcement with 1:1.5:3 (1 cement : 1.5 coarse sand(zone-III) : 3 graded stone aggregate 20 mm nominal size).	5.00	Cum	5500.00	27500.00



Sl. No	Description of Work / Item(s)	Qty	Units	Rate	Amount
9	Centering and shuttering including strutting, propping etc. and removal of form for : Foundations, footings, bases of columns, etc. for mass concrete	45.00	Sqm	100.00	4500.00
10	Centering and shuttering including strutting, propping etc. and removal of form for : Lintels, beams, plinth beams, girders, bressumers and cantilevers	32.00	Sqm	400.00	12800.00
11	Centering and shuttering including strutting, propping etc. and removal of form for : Columns, Pillars, Piers, Abutments, Posts and Struts	16.00	Sqm	400.00	6400.00
12	Centering and shuttering including strutting, propping etc. and removal of form for : Suspended floors, roofs, landings, balconies and access platform	21.00	Sqm	95.00	1995.00
13	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	1560.00	Kg	75.00	117000.00
14	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete above plinth level Thermo-Mechanically Treated bars of grade Fe-500D or more.	620.00	Kg	75.00	46500.00
15	Boring, providing and installation bored cast-in-situ reinforced cementconcrete piles of grade M-25 of specified diameter and length below the pile cap, to carry a safe working load not less than specified, excluding the cost of steel reinforcement but including the cost of boring with bentonite solution and temporary casing of appropriate length for setting out and removal of same and the length of the pile to be embedded in the pile cap etc. by percussion drilling using Direct mud circulation (DMC) or Bailer and chisel technique by tripod and mechanical Winch Machine all complete, including removal of excavated earth with all its lifts and leads (length of pile for payment shall be measured up to bottom of pile cap). Note: Truck Mounted rotary/TMR/Tubewell boring machine shall not be used . 450 mm dia piles	9.00	Mtr	1200.00	10800.00
16	Brick work with flyash F.P.S. (non modular) bricks of class designation 7.5 in foundation and plinth in:Cement mortar 1:4 (1 cement : 4 coarse sand)	13.00	Cum	5300.00	68900.00
17	Brick work with flyash F.P.S. (non modular) brick of class designation 7.5 in superstructure above plinth level up to floor five level in :Cement mortar 1:4 (1 cement : 4 coarse sand)	10.00	Cum	4800.00	48000.00
18	12 mm cement plaster of mix :1:6 (1 cement: 6 fine sand)	85.00	Sqm	150.00	12750.00
19	15 mm cement plaster of mix :1:6 (1 cement: 6 fine sand)	72.00	Sqm	150.00	10800.00
20	6 mm cement plaster of mix : 1:3 (1 cement : 3 fine sand)	50.00	Sqm	150.00	7500.00
21	Neat cement Punning	18.00	Sqm	40.00	720.00
22	Steel work in built up tubular (round, square or rectangular hollow tubes etc.) trusses etc., including cutting, hoisting, fixing in position and applying a priming coat of approved steel primer, including welding and bolted with special shaped washers etc. complete. Hot finished welded type tubes	8500.00	Kg	100.00	850000.00

Sl. No	Description of Work / Item(s)	Qty	Units	Rate	Amount
23	Distemping with 1st quality acrylic distemper (ready mixed) having VOC content less than 50 gms/litre, of approved manufacturer, of required shade and colour complete, as per manufacturer's specification. Two or more coats on new work	80.00	Sqm	95.00	7600.00
24	Finishing walls with Acrylic Smooth exterior paint of required shade : New work (Two or more coat applied @ 1.67 ltr/10 sqm over and including priming coat of exterior primer applied @0.90 kg/10 sqm)	115.00	Sqm	95.00	10925.00
25	Providing and laying Ceramic glazed floor tiles of size 300x300 mm (thickness to be specified by the manufacturer) of 1st quality conforming to IS : 15622 of approved make in colours such as White, Ivory, Grey, Fume Red Brown, laid on 20 mm thick cement mortar 1:4 (1 Cement : 4 Coarse sand), Jointing with grey cement slurry @ 3.3 kg/sqm including pointing the joints with white cement and matching pigment etc., complete	15.00	Sqm	500.00	7500.00
26	Providing and fixing 1st quality ceramic glazed wall tiles conforming to IS: 15622 (thickness to be specified by the manufacturer), of approved make, in all colours, shades except burgundy, bottle green, black of any size as approved by Engineer-in-Charge, in skirting, risers of steps and dados, over 12 mm thick bed of cement mortar 1:3 (1 cement : 3 coarse sand) and jointing with grey cement slurry @ 3.3kg per sqm, including pointing in white cement mixed with pigment of matching shade complete.	73.00	Sqm	500.00	36500.00
27	Painting with synthetic enamel paint of approved brand and manufacture of required colour to give an even shade Two or more coats on new work over an under coat of suitable shade with ordinary paint of approved brand and manufacture	30.00	Sqm	95.00	2850.00
28	Providing and fixing 1mm thick M.S. sheet door with frame of 40x40x6 mm angle iron and 3 mm M.S. gusset plates at the junctions and corners, all necessary fittings complete, including applying a priming coat of approved steel primer. Using flats 30x6mm for diagonal braces and central cross piece	4.00	Sqm	2500.00	10000.00
29	Providing and fixing T-iron frames for doors, windows and ventilators of mild steel Teesections, joints mitred and welded, including fixing of necessary butt hinges and screws and applying a priming coat of approved steel primer Fixing with 15x3 mm lugs 10 cm long embedded in cement concrete block 15x10x10 cm of C.C. 1:3:6 (1 Cement : 3 coarse sand : 6 graded stone aggregate 20 mm nominal size).	100.00	Kg	80.00	8000.00
30	Providing and fixing factory made uPVC door frame made of uPVC extruded sections having an overall dimension as below (tolerance ± 1 mm), with wall thickness 2.0 mm (± 0.2 mm), corners of the door frame to be Jointed with galvanized brackets and stainless steel screws, joints mitred and Plastic welded. The hinge side vertical of the frames reinforced by galvanized M.S. tube of size 19 X 19 mm and 1mm (± 0.1 mm) wall thickness and 3 nos. stainless steel hinges fixed to the frame complete as per manufacturer's specification and direction of Engineer- incharge Extruded section profile size 48x40 mm	11.00	Mtr.	180.00	1980.00

(4/6)

Sl. No	Description of Work / Item(s)	Qty	Units	Rate	Amount
31	Providing and fixing to existing door frames. 24 mm thick factory made PVC door shutters made of styles and rails of a uPVC hollow section of size 59x24 mm and wall thickness 2 mm (± 0.2 mm) with inbuilt edging on both sides. The styles and rails mitred and joint at the corners by means of M.S. galvanised/ plastic brackets of size 75x220 mm having wall thickness 1.0 mm and stainless steel screws. The styles of the shutter reinforced by inserting galvanised M.S. tube of size 20x20 mm and 1 mm (± 0.1 mm) wall thickness. The lock rail made up of 'H' section, a uPVC hollow section of size 100x24 mm and 2 mm (± 0.2 mm) wall thickness, fixed to the shutter styles by means of plastic/galvanised M.S. 'U' cleats. The shutter frame filled with a uPVC multi-chambered single panel of size not less than 620 mm, having over all thickness of 20 mm and 1 mm (± 0.1 mm) wall thickness. The panels filled vertically and tie bar at two places by inserting horizontally 6 mm galvanised M.S. rod and fastened with nuts and washers, complete as per manufacturer's specification and direction of Engineer-in-charge. (For W.C. and bathroom door shutter).	4.00	Sqm	900.00	3600.00
32	Providing and fixing aluminium tower bolts, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :150x10 mm	5.00	Each	40.00	200.00
33	Providing and fixing aluminium handles, ISI marked, anodised (anodic coating not less than grade AC 10 as per IS : 1868) transparent or dyed to required colour or shade, with necessary screws etc. complete :125mm	5.00	Each	45.00	225.00
34	Providing and fixing aluminium die cast body tubular type universal hydraulic door closer (having brand logo with ISI, IS : 3564, embossed on the body, door weight upto 35 kg and door width upto 700 mm), with necessary accessories and screws etc. complete	2.00	Each	600.00	1200.00
35	Providing and fixing white vitreous china pedestal type water closet (European type W.C. pan) with seat and lid, 10 litre low level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever), conforming to IS : 7231, with all fittings and fixtures complete, including cutting and making good the walls and floors wherever required : W.C. pan with ISI marked white solid plastic seat and lid	3.00	Each	4000.00	12000.00
36	Providing and fixing white vitreous china flat back or wall corner type lipped front urinal basin of 430x260x350 mm or 340x410x265 mm sizes respectively.	2.00	Each	800.00	1600.00
37	Providing and fixing wash basin with C.I. brackets, 15 mm C.P. brass pillar taps, 32 mm C.P. brass waste of standard pattern, including painting of fittings and brackets, cutting and making good the walls wherever require: White Vitreous China Wash basin size 630x450 mm with a single 15 mm C.P.brass pillar tap	4.00	Each	1000.00	4000.00
38	Providing and fixing P.V.C. waste pipe for sink or wash basin including P.V.C. waste fittings complete. Semi rigid pipe 32 mm dia	4.00	Each	70.00	280.00



(8/6)

Sl. No	Description of Work / Item(s)	Qty	Units	Rate	Amount
39	Providing and fixing 600x450 mm beveled edge mirror of superior glass (of approved quality) complete with 6 mm thick hard board ground fixed to wooden cleats with C.P. brass screws and washers complete.	4.00	Each	600.00	2400.00
40	Providing and fixing toilet paper holder :C.P. brass	3.00	Each	500.00	1500.00
41	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply, including all CPVC plain & brass threaded fittings, i/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement and the cost of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge. Concealed work; including cutting chases and making good the walls etc. 15 mm nominal outer dia Pipes	15.00	Mtr.	250.00	3750.00
42	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings This includes jointing of pipes & fittings with one step CPVC solvent cement, trenching, refilling & testing of joints complete as per direction of Engineer in Charge. External work 25 mm nominal outer dia Pipes	100.00	Mtr.	150.00	15000.00
43	Providing and fixing uplasticised PVC connection pipe with brass unions : 45 cm length 15 mm nominal bore	7.00	Each	55.00	385.00
44	Providing and fixing C.P. brass long body bib cock of approved quality conforming to IS standards and weighing not less than 690 gms. 15 mm nominal bore	3.00	Each	300.00	900.00
45	Providing and fixing C.P. brass stop cock (concealed) of standard design and of approved make conforming to IS:8931. 15 mm nominal bore	7.00	Each	320.00	2240.00
46	Providing and fixing mild steel round holding down bolts with nuts and washer plates complete.	100.00	Kg	70.00	7000.00
47	Providing and fixing precoated galvanised iron profile sheets (size, shape and pitch of corrugation as approved by Engineer-in-charge) 0.50 mm (+ 0.05 %) total coated thickness with zinc coating 120 grams per sqm as per IS: 277, in 240 mpa steel grade, 5-7 microns epoxy primer on both side of the sheet and polyester top coat 15-18 microns. Sheet should have protective guard film of 25 microns minimum to avoid scratches during transportation and should be supplied in single length upto 12 metre or as desired by Engineer-in-charge. The sheet shall be fixed using self drilling/self tapping screws of size (5.5x 55 mm) with EPDM seal, complete upto any pitch in horizontal/ vertical or curved surfaces, excluding the cost of purlins, rafters and trusses and including cutting to size and shape wherever required.	370.00	Sqm	470.00	173900.00



16/6

Sl. No	Description of Work / Item(s)	Qty	Units	Rate	Amount
48	Kota stone slab flooring over 20 mm (average) thick base laid over and jointed with grey cement slurry mixed with pigment to match the shade of the slab, including rubbing and polishing complete with base of cement mortar 1 : 4 (1 cement : 4 coarse sand) :25 mm thick	100.00	Sqm	800.00	80000.00
					21,74,025.00

(Rupees Twenty One Lakhs Seventy Four Thousand Twenty Five only)

N.B: The rates are exclusive of applicable GST.


28.02.2025
(Bidura Chandra Sahoo)
Asst. General Manager (E-C)
B.P.I. Airport, Bhubaneswar

FORM – III

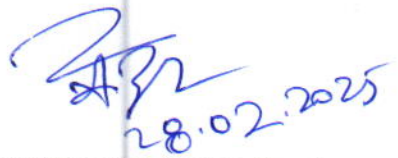
(Under rule 21 (2) of the Contract Labour (Regulation & Abolition) Central Rules, 1971; and Rule 7 (3) of the Inter State Migrant Workmen (Regulation of Employment and Conditions of Service) Central Rules, 1980

FORM OF CERTIFICATE BY PRINCIPAL EMPLOYER

Certified that:

I have engaged the applicant (name of the contractor) M/s. Prasanta Kumar Beuria, Plot No. 169, House No.- 1680, Nuapatana, P.O- Banguari, P.S. Baliana, Dist: Khurda as a contractor in my establishment for the work **Construction of Toilet and allied Civil Works AAICLAS Cargo, Terminal at B.P.I. Airport, Bhubaneswar** to be carried out with effect from 09.03.2025.

1. I undertake to be bound by all the provisions of the Contract Labour (Regulation & Abolition) Act, 1970 (37 of 1970) and the Contract Labour (Regulation & Abolition) Central Rules, 1971* / the Inter State Migrant Workmen Regulation of Employment and Condition of Service) Central Rules, 1980 * in so far as the provisions are applicable to me in respect of the Employment of Contract Labour/ Inter State Migrant Workmen * by the applicant in my establishment.
2. The engagement of contract labour in the said work is not prohibited under sub section (1) of section 10 of the Contract Labour (Regulation & Abolition) Act, 1970 (37 of 1970) or an award or a settlement.*


Signature of Principle Employer
Airports Authority of India,
B.P.I. Airport, Bhubaneswar

Place: Bhubaneswar Airport

Date: 28.02.2025

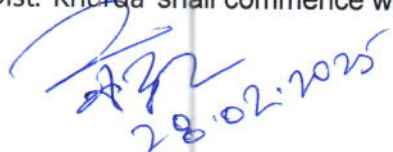
FORM- VII

(Under rule 25 (2) (viii) and rule 81 (3) of the Contract Labour (Regulation & Abolition) Central Rules, 1971; and rule 26 (3) and 239 (1) of the Building and Other Construction Workers (Regulation of Employment and Condition of Service) Central Rules, 1998

Notice of commencement of work

1	Name of the Principal Employer under the Contract Labour (Regulation & Abolition) Act, 1970 (37 of 1970) / Employer under the Building and Other Construction Workers (Regulation of Employment and Condition of Service) Act, 1996 (27 of 1996)*	Shri. Bidura Chandra Sahoo Asst. General Manager (Engg. Civil), Airports Authority of India, B.P.I. Airport, Bhubaneswar
2	LIN/ PAN No.	1-1635-4341-8
3	Email Id	bcsahoo@aai.aero
4	Mobile No.	8249944145
5	Name of the Contractor under the Contractor Labour (Regulation & Abolition) Act, 1970 (37 of 1970) (if applicable)	M/s. Prasanta Kumar Beuria, Plot No. 169, House No.- 1680, Nuapatana, P.O- Banguari, P.S. Baliana, Dist: Khurda
6	LIN/ PAN No.	-
7	Email Id	-
8	Mobile No.	-
9	No. and date of certificate of Registration / License	-
10	Name of person in-charge of the work	Shri. Bidura Chandra Sahoo Asst. General Manager (Engg. Civil), Airports Authority of India, B.P.I. Airport, Bhubaneswar
11	LIN/PAN No. of person in-charge of the work	-
12	Email Id of person in-charge of the work	bcsahoo@aai.aero
13	Mobile No. of person in-charge of the work	8249944145
14	The nature of work involved and the facilities, including any plant and machinery provided in the case of a building or other construction work.	Construction of Toilet and allied Civil Works AAICLAS Cargo
15	The arrangement for the storage of explosives, if any, to be used in the building or other construction work.	Not Applicable

I/ we hereby intimate that the work **Construction of Toilet and allied Civil Works AAICLAS Cargo, Terminal at B.P.I. Airport, Bhubaneswar** given to M/s. Prasanta Kumar Beuria, Plot No. 169, House No.- 1680, Nuapatana, P.O- Banguari, P.S. Baliana, Dist: Khurda shall commence with effect from 09.03.2025.


28.02.2025
Signature of the Principal Employer

To

The Labour Commissioner (Central), Kendriya Shrama Sadan, Plot No. N-7/6 & 7, IRC Village, Behind ISCON Temple, Nayapalli, Bhubaneswar – 15, Odisha.