

 न्यूक्लियर पावर कॉर्पोरेशन ऑफ इंडिया लिमिटेड Nuclear Power Corporation of India Limited NPS IN THE SERVICE OF THE NATION	न्यूक्लियर पावर कॉर्पोरेशन ऑफ इंडिया लिमिटेड Nuclear Power Corporation of India Limited (भारत सरकार का उद्यम A Government of India Enterprise) मद्रास परमाणु बिजलीघर MADRAS ATOMIC POWER STATION कल्याण - 603 102 चेंगलपट्टु जिला (तमिलनाडु) Kalpakkam - 603 102 Chengalpattu Dist. (T.N.)	 मदो पद्याओ बंदी पद्याओ
नि.प.सं. CIN: U40104MH1987GOI149458		वेबसाइट पता Website Address: www.npcil.nic.in
संविदा एवं सामग्री प्रबंधन (कार्य) C&MM (WORKS)		

संदर्भ सं: मपबिघ/केनिक/नि.सा.उ./सार्वजनिक/ईटी 891/2024

Ref No: MAPS/CTC/CSR/PUBLIC/ET891/2024

दिनांक Date : 25/1/25

कार्य आदेश सं Work Order No. : 12845


लेजर खाता सं Ledger Account No.: 78203

उप लेजर सं Sub Ledger No. : CS7371

सेवा में TO

मेसर्स एसएवी कंस्ट्रक्शन्स M/s SAV Constructions,
No.885, राधापुरम मेयन रोड Radhapuram Main Road,
वडकंकुलम Vadakkankulam,
तिरुनेलवेली जिला Tirunelveli District-627116.
जीएसटी सं. GST No: 33ABEFS4315D1ZN
ई मेल-E-mail: sav_constructions@yahoo.co.in
मोबाइल Mobile: 9443130652

क्या एमएसएमई बोलीदार है Whether MSME bidder	NA
क्या अजा/अजजा वर्ग के है Whether SC/ST category	NA
बयाना जमा EMD	PAID

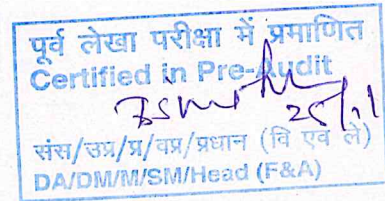

विषय: मपबिघ निगम सामाजिक उत्तरदायित्व गतिविधियों के अंतर्गत तिरकलुकुन्ड्रम में दिव्यांग छात्राओं के लिए स्कूल भवन निर्माण करने।

Sub.: Construction of School Building for persons with Disability students at Thirukalukundram under MAPS CSR Activities.

संदर्भ: 1. दिनांक: 12/12/2024 को खोली गई निविदा सं. मपबिघ/केनिक/नि.सा.उ./सार्वजनिक/ईटी 891/2024

2. 10/01/2025 को आयोजित बातचीत बैठक का कार्यवृत्त

Ref.: 1. TENDER NO: MAPS/CTC/CSR/PUBLIC/ET891/2024 OPENED ON 12/12/2024

2. Minutes of Negotiation meeting held on 10/01/2025

महोदय Dear Sirs,

उपरोक्त कार्य हेतु निआसू सं. मपबिघ/केनिक/नि.सा.उ./सार्वजनिक/ईटी 891/2024 के प्रतिक्रिया में ऊपर कथित आपकी निविदा और 12/12/2024 को खोली गई का कृपया संदर्भ लें।

Please refer to your above cited tender in response to NIT No. MAPS/CTC/CSR/PUBLIC/ET891/2024 for the above work and opened on 12/12/2024

- आपको यह सूचित करना है कि निविदा द्वारा दिए गए दरों और मात्राओं की अनुसूची में दिखाए गए कार्य मदों के लिए आपके द्वारा प्रस्तुत निविदा और उपरोक्त संदर्भित अनुवर्ती पत्रों में संशोधित के अनुसार वस्तु एवं सेवा कर @ 18% सहित कुल मूल्य (₹. 62,08,751/- + वस्तु एवं सेवा कर ₹. 11,17,575/-)

₹. 73,26,326/- (तिहत्तर लाख छब्बीस हजार तीन सौ छब्बीस) के लिए कृते न्यूपाकाइलि और की ओर से स्वीकार किया गया है।

This is to inform you that the tender submitted by you and modified in subsequent letters referred above has been accepted for and on behalf of NPCIL, for the items of work shown in the schedule of quantities and rates covered by the tender for a total value of (₹.62,08,751/- + Goods & Service Tax ₹. 11,17,575/-) ₹. 73,26,326/- (Rupees Seventy Three Lakh Twenty Six Thousand Three Hundred and Twenty Six only) including Goods & Service Tax @ 18%

2. कार्य का निष्पादन निविदा दस्तावेज़ में उल्लिखित निबंधनों, शर्तों, विशिष्टताओं और आरेखण के अनुसार सख्ती से और साथ ही साथ सर्वश्रेष्ठ कामगार द्वारा किया जाएगा। आपको कार्य पर हमेशा अर्हतापूर्ण अभियंताओं/पर्यवेक्षकों को नियोजित करना होगा तथा पर्यवेक्षण करना होगा। इस कार्य की संतोषजनक पूर्ति हेतु आवश्यक ऐसी मशीनरी तथा उपकरणों और अन्य सामग्रियों को लगाना होगा और जरूरत होने पर स्थल को भी लाना होगा।

The work shall be carried out strictly in accordance with the terms, conditions, specifications and drawings stipulated in the tender and also in best workman like manner. You shall employ and maintain qualified engineers/supervisors in the job at all times. You shall also bring to the site and employ such machinery and equipment and other materials as are necessary for the satisfactory completion of this work.

3. कार्य को कार्य प्रारंभ दिनांक से 6 महीना (मानसून अवधि अहित कैलेंडर माह) के भीतर सभी तरह से पूर्ति किया जाना है। निम्नांकित दस्तावेजों की प्रस्तुति पर इस कार्य आदेश जारी दिनांक से चौदह दिनों के अन्दर कार्य प्रारंभ दिनांक गिना जाएगा:


- ए. निष्पादन गारंटी
- बी. मपबिघ, न्यूपाकॉइलि और मेसर्स एसएवी कंस्ट्रक्शन्स एण्ड सर्वीजस के नाम में संयुक्त वैध बीमा पॉलिसी
- सी. करार निष्पादन
- डी. यथा लागू वैध श्रामिक अनुज्ञप्ति
- ई. वैध मुख्तारनामा
- एफ. आयकर पेन कार्ड सं.
- जी. यथा लागू वैध वस्तु एवं सेवा कर पंजीकरण संख्या
- एच. बैंक आईएफएससी/आरटीजीएस खाता विवरण
- आई. कार्य आदेश स्वीकृति पत्र

निविदा का सारतत्व समय होगा और कार्य की अनुमोदित कार्यक्रम के अनुसार कार्य की पूर्ति किया जाना चाहिए।

The work shall be completed in all respects within 6 Months (Calendar Month including monsoon period) from the date of commencement. The date of commencement will be reckoned within fourteen days from the date of issue of this work order on submission of the following documents.

- a. Performance guarantee
- b. Valid insurance policy jointly in the name of MAPS, NPCIL and M/s SAV Constructions
- c. Executing the agreement.
- d. Valid labour licence as applicable
- e. Valid Power of attorney
- f. IT Pan card no.
- g. Valid Goods & Service Tax registration No. as applicable
- h. Bank IFSC/RTGS account details
- i. Work order acceptance letter

The time shall be essence of the contract and the work shall be completed as per approved programme of work.



4. वृद्धि भुगतान स्वीकार्य नहीं है।

Escalation payment is not admissible

5. इस संविदा से संबंधित सभी मामलों को सुलझाने के लिए किसी प्राधिकृत प्रतिनिधि का नाम सूचित करने और साथ ही उचित मूल्य के स्टांप पेपर पर उनका विधिवत् निष्पादित किया हुआ मुख्तारनामा प्रस्तुत करने का आपसे अनुरोध है।

You are requested to inform the name of the authorized representative who will deal with all matters relating to the contract and the Power of Attorney in his favour duly executed on stamped paper of an appropriate value shall be furnished.

6. इस संविदा के निष्पादन और दोष दायित्व अवधि की समाप्ति होने तक आप पर आरोप्य तृतीय पक्षकार जोखिम सहित कोई हानि, कार्य में तोड़फोड़ या क्षति, संरचना, संपत्ति आदि की हानि का सभी संबंधित प्रतिपूर्ति करने के लिए आप पूर्ण रूप से देनदार होंगे। इसका निर्णय प्रभारी अभियंता द्वारा लिया जाएगा तथा इस विषय के संबंध में उनका निर्णय अंतिम होगा।

During the execution of the contract and until completion of defect liability period will be fully liable to compensate all concerned for any loss, damage or destruction of work, structure, property etc. including third party risk arising due to causes attributable to you which will be decided by the Engineer-in-Charge whose decision in this regard will be final.

7. आप से अपेक्षा है कि उपरोक्त अवधि हेतु इस कार्य में लगानेवाले आपके सभी श्रामिकों के संबंध में पूरे अनुबंध मूल्य के लिए सीएआर पॉलिसी, अन्य पक्ष की देयता पालिसी, कामगार क्षतिपूर्ति पालिसी लेकर तथा इससे संबंधित दस्तावेज को प्रभारी अभियंता को कार्य प्रारंभ करने के पहले प्रस्तुत करना होगा (संविदा के शर्तों के अनुसार)।

You are required to take CAR Policy for the whole contract value, Third Party Liability Policy, Workmen Compensation Policy in respect of all your workmen engaged in the work for the above period and documents in this regard should be submitted to Engineer-in-Charge before start of work. (As per the conditions of the contract).

कार्य संविदा पर केंद्रीय/राज्य सरकार द्वारा समय-समय पर यथा अधिसूचित आयकर और सांविधिक लेवी, बीओसीडब्ल्यू उपकर यदि कोई हो तो, इस कार्य हेतु आपके चालू बिल और अंतिम बिल से निर्धारित तरीके से वसूली जाएगी। प्रभारी अभियंता को आपके स्थाई खाता संख्या (पैन कार्ड) सूचित करने का आपसे अनुरोध है।

Income Tax and statutory Levy, BOCW Cess, if any, on works contract as notified by Central /State Govt. from time to time shall be recovered from your running bills as well as final bills for this work in the prescribed manner. You are requested to intimate your Permanent Account Number to Engineer-in-Charge.

9. भुगतान जमा करते समय सीजीएसटी / एसजीएसटी / आईजीएसटी पर लागू टीडीएस काट दिया जाएगा Applicable TDS under CGST/SGST/IGST will be deducted while crediting the payment.

10. इस कार्य हेतु प्रभारी अभियंता श्रीमती सपना कुमारी मीना, वैअ/डी, होंगे। आप, प्रभारी अभियंता के परामर्श से कार्य को तत्काल प्रारंभ करने की आवश्यक प्रबंध करें।

Smt Sapna Kumari Meena, SO/D, will be the Engineer-in-Charge of this work. You may make necessary arrangements for commencing the work immediately in consultation with Engineer-in charge.

11. आप ध्याना दें कि जमानत जमा ₹. 7,32,633/- होगी (संविदा मूल्य में 10% की दर पर)। प्रारंभ में कार्य आरंभ करने के पहले 14 दिनों के अंदर ₹. 3,66,317/- (जमानत जमा में 50%) के लिए निष्पादन गारंटी आपको प्रस्तुत करना होगा। जमानत जमा की शेष राशि प्रत्येक बिल राशि में 6% की दर पर चल लेखा बिल/अंतिम बिल से ₹. 3,66,316/- को वसूली जाएगी। जमानत जमा राशि में कोई ब्याज नहीं होगी।

You may please note that Security Deposit will be ₹. 7,32,633/- (@ 10% of contract value). Initially you will have to submit a performance guarantee for ₹. 3,66,317/- (50% of Security Deposit) within 14 days before commencement of the work. The remaining amount of Security Deposit of ₹. 3,66,317/- will be recovered from the RA bill at the rate of 6% of each bill amount / Final bill. Security Deposit amount will not bear any interest.

12. आपको, संविदा श्रमिक (विनियमन व उन्मूलन) अधिनियम 1970 के विभिन्न प्रावधानों और समय-समय पर उसके अधीन बनाए गए नियमों का अनुपालन करना होगा। यदि संविदा श्रमिक अधिनियम आपके संगठन के लिए लागू नहीं होता तो तदनुसार काम प्रारंभ करने के पूर्व इस काम के प्रभारी अभियंता को आपको सूचित करना होगा। आगे आपको अन्य कानूनों के प्रावधानों जैसे कार्मिक क्षतिपूर्ति अधिनियम 1923, न्यूनतम वेतन अधिनियम 1948, कभनि अधिनियम, उपदान अधिनियम और आपके संगठनों के लिए यथा लागू अन्य श्रम विधि के प्रावधानों का पालन करना होगा। यदि मूल नियोक्ता होने के कारण न्यूपाकाइलि को विविध कानूनों के प्रावधानों के अंतर्गत कोई खर्च का वहन करना होता तो, आप से /आपके बिल से उसे वसूल करने के लिए न्यूपाको हकदार होगा।


You shall comply with various provisions of the contract labour (Regulations & Abolition) Act 1970 and rules framed thereafter from time to time. In case, the Contract labour Act does not apply to your organisation you should intimate the Engineer-in-charge of this work accordingly before commencing the work. Further you shall also comply with the provisions of other laws such as Workmen's Compensation Act 1923, Minimum wages Act 1948, E.P.F. Act, Gratuity Act and other labour laws as applicable to your organisation. In case, NPCIL is required to incur any expenses as principal employer under the provisions of the various laws, NPC shall be entitled to recover the same from you/your bills.

इस कार्य हेतु आपके द्वारा प्रस्तावित और नियोजित किए जाने वाले कार्मिकों की अधिकतम संख्या पर आधारित श्रम अनुज्ञप्ति प्राप्त करने हेतु मुख्य नियोक्ता का प्रमाणपत्र संलग्न है। आप कृपया ध्यान दें कि इस कार्य आदेश जारी होने के 14 दिनों के भीतर आपके द्वारा काम में लगाने हेतु दर्शाए गए कार्मिकों की अधिकतम संख्या हेतु श्रम अनुज्ञप्ति के लिए आपको उस क्षेत्र के सहायक श्रम आयुक्त को आवेदन करना होगा। कार्य के प्रभारी अभियंता को कार्यारंभ से एक सप्ताह के भीतर आवेदन की प्रति प्रस्तुत करना होगा।

Principal Employer's Certificate for obtaining labour license based on the maximum number of workmen you proposed to employ for this work is enclosed. You may please note that within 14 days from the date of issue of this work order, you will have to apply for a labour license to the Asstt. Labour Commissioner, of the area, for the maximum number of workers you had indicated to engage on the work. A copy of the application will have to be furnished to the Engineer-in-charge of the work within a week time from start of work.

14. आपके लागत राशि ₹.100/- मूल्यवाले स्टॉप कागज पर कार्य प्रारंभ के पूर्व 14 के अंदर करार पर हस्ताक्षर करने और अनुवर्ती करार (निविदा आमंत्रण सूचना के खण्ड सं.4.3 में बताए गए अनुसार) हेतु कार्यालय में उपस्थित होने का आपसे अनुरोध है। औपचारिक करार का निष्पादन होने तक इसके अधीन संदर्भित पत्रों के साथ मूल निविदा और यह कार्य आदेश हमारे बीच बाध्यकारी संविदा होगा।

You are requested to attend the office within 14 days before commencement of work for signing the agreement and supplementary Agreement (as stated at clause no. 4.3 of NIT) on a stamp paper valued ₹.100/- at your cost. Till a formal agreement is executed the original tender together with letters under reference and this work order shall form the binding contract between us.




- You are requested to intimate details of your Bank A/c. Bank Branch code and the 11 digit IFSC/RTGS code to facilitate release of payment by Electronic mode(for outstation contractors, the address with the phone No. of the Bank may also be furnished)

- The compensation for delay to be levied on contractor, if applicable, is 1% per week or part thereof of contract value subject to a maximum of 5% of contract value. The recovery of compensation for delay shall be made irrespective of the fact whether NPCIL has suffered the loss or otherwise.

- Payment towards final bill will be subjected to submission of documents as stated in the Tender document Clause No.16 C

- Considering the Anti-profiteering measures provided in relevant provisions of CGST Act and SGST Act, it is obligatory for the contractor to pass on the benefit of additional input tax credits / lower output tax in GST regime to the NPCIL by way of price reduction.

- Page 5 of 6

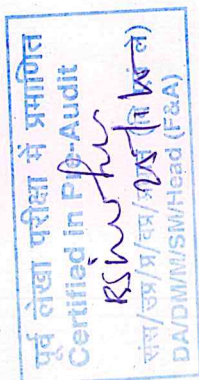


21. इस कार्य हेतु कोई अपसामान्य उच्च दर मद नहीं है।
No AHR items for this work.
22. निविदा आमंत्रण सूचना के अनुसूची ए के अनुसार संविदा हेतु दोष दायित्व अवधि 12 माह हैं।
The defect liability period for the contract is 12 Months as per schedule A of NIT

कृपया इस कार्य आदेश की पावती सूचना दें।

Kindly acknowledge receipt of this Work Order.

सधन्यवाद Thanking you,

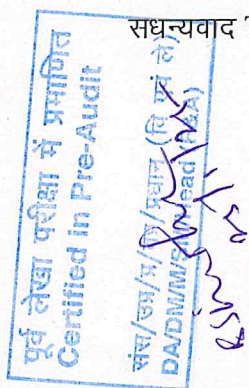

ई. परंधामा रेड्डी E. PARANDHAMA-REDDY
प्रभारी अभियंता (सिरा परिरक्षक मरम्मत एवं उन्नयन कार्य)
Engineer in-Charge (End Shield Repair & Upgradation Works)
न्यूक्लियर पावर कॉर्पोरेशन ऑफ इंडिया लिमिटेड
NUCLEAR POWER CORPORATION OF INDIA LIMITED
भारत सरकार का उद्यम A Government of India Enterprise)
मद्रास परमाणु विजलीघर Madras Atomic Power Station
कल्याणम् Kalpakam-603 102

आपका Yours faithfully

वरिष्ठ अनुरक्षण अभियंता (सिविल) SME(CIVIL)

(इकाई के पदधारी का नाम व पदनाम)

(Name & Designation of Official of Unit)

कृत न्यूपाकाइलि और की ओर से

For and on behalf of NPCIL

अनुलग्नक Encl.:

- सामग्री आपूर्ति की अनुसूची Schedule of Supply of Material
- मात्राओं व दरों की अनुसूची Schedule of Quantities & Rates
- मुख्य नियोक्ता प्रमाणपत्र Principal Employer's Certificate

प्र.प्रे.C.C. : अनु अधी/मुअधी / बिनि - सूचनार्थ MS/CS/SD – for information Pl.

- : श्रीमती सपना कुमारी मीना, वैअ/डी, प्रभारी अभियंता
Smt. Sapna Kumari Meena, SO/D, Engineer-in-charge
- : प्रधान (वि व ले) Head (F&A)
- : प्रधान (मासं) Head (HR)
- : केंद्रीकृत निविदा कक्ष प्रति CTC copy
- : सहायक श्रम आयुक्त (केंद्रीय) Assistant labour Commissioner (Central)
- : सुलह अधिकारी (केंद्रीय) Conciliation Officer (Central)
- : राजभाषा अनुभाग Rajbhasha Anubhag.

दर और मात्रा की अनुसूची Schedule of Quantities and Rates

निविदा सं. : मपबिघ/केनिक/नि.सा.उ./सार्वजनिक/ ईटी 891/2024
TENDER NO : MAPS/CTC/CSR/PUBLIC/ET891/2024

कार्य का नाम :मपबिघ निगम सामाजिक उत्तरदायित्व गतिविधियों के अंतर्गत तिरकलुकुन्ड्रम में दिव्यांग छात्राओं के लिए स्कूल भवन निर्माण करने।
OF THE WORK :Construction of School Building for persons with Disability students at Thirukalukundram under MAPS CSR Activities.

NAME
अपसामान्य निम्न
दर / अपसामान्य
उच्च दर मद
ALR / AHR Items

मद का विवरण Description of item		मात्रा Quantity	यूनिट Unit	संख्याओं में दर Rate in Figures	शब्दों में दर Rate in words	राशि Amount	अपसामान्य निम्न दर / अपसामान्य उच्च दर मद ALR / AHR Items
Part-A (Civil works)							
1.00	Earth work in excavation by mechanical means (Hydraulic Excavator) manual means in foundation trenches or drains (not exceeding 1.5 m in width or 10 sqm on plan) including dressing of sides and ramming of bottoms, for all Lifts, including getting out the excavated soil and disposal of surplus excavated soil as directed, and Back filling available Excavated Earth Trench, Plinth, Sides of Foundation Etc., in layers not Exceeding 20cm in depth Consolidating each deposited Layer By Ramming and Watering , lead upto 50 m for all lifts. For All kinds of soil as directed by Engineer in charge.	245.00	CuM	450.00	Rupees Four Hundred Fifty Only	110250	-
1.01	Providing and laying soling 150mm thick under floor with 150mm size hard granite soling stones including supplying, filling and packing voids with 40 to 75mm size hard granite metal and gravel bindage, watering, well rammed, compaction by power/hand roller etc., complete all as directed by Engineer-in-charge.	320.00	SqM	575.00	Rupees Five Hundred Seventy Five Only	184000	-
1.02	Providing and laying plain cement concrete 1:3:6 using 20mm maximum size graded aggregates including mechanical mixing, transporting and placing in required position, ramming, compaction, lagging , curing, shuttering, dewatering if any, complete all as per specification for tagging courses in foundation for walls, footings, floor drains etc., encasing pipes and other required works directed by Engineer-in-Charge complete all as per specifications.	45.00	CuM	7000.00	Rupees Seven Thousand Only	315000	-
1.03	Providing and laying cast insitu controlled reinforced cement concrete of specified grade at all levels and lifts mentioned below using 20mm maximum size hard granite machine crushed graded stone aggregates including weigh batching, charges for mixing & cost of admixture, mechanical mixing, transporting and placing at all lifts, vibrating, consolidating, curing and finishing smooth of all exposed faces complete for column footings, columns, lintels, sunshades, gutter slabs, beams, slabs, water tank, machine foundation and all other structural elements including dewatering wherever necessary (Formwork and reinforcement will be paid for separately) all as per specification and all as shown in drawings and as directed by the Engineer-in-charge for all insitu item. Note: 1. The rate of concrete shall include all labour, equipment, charges for mixing & cost of admixture. Chemical admixture conforming to IS 9103 shall be mixed in fresh concrete and prior permission from Engineer-in-charge shall be obtained for dosage and compatibility 2. Test certificate of cement, procured from dealer/company to be submitted for all cement related works by the Contractor. 3. The rate shall be quoted on the basis of using minimum cement per cu.m. of concrete mentioned below for relevant grade of concrete. Any upward/ Downward variation required to obtain the specified strength will be paid for or deducted at the rate of Rs.8/Kg of cement . M30 grade with 350 kg. of Ordinary Portland Cement per cu.m. of concrete all works upto plinth level.	51.00	CuM	9000.00	Rupees Nine Thousand Only	459000	-
1.04	Providing and laying cast insitu controlled reinforced cement concrete of specified grade at all levels and lifts mentioned below using 20mm maximum size hard granite machine crushed graded stone aggregates including weigh batching, charges for mixing & cost of admixture, mechanical mixing, transporting and placing at all lifts, vibrating, consolidating, curing and finishing smooth of all exposed faces complete for column footings, columns, lintels, sunshades, gutter slabs, beams, slabs, water tank, machine foundation and all other structural elements including dewatering wherever necessary (Formwork and reinforcement will be paid for separately) all as per specification and all as shown in drawings and as directed by the Engineer-in-charge for all insitu item. Note: 1. The rate of concrete shall include all labour, equipment, charges for mixing & cost of admixture. Chemical admixture conforming to IS 9103 shall be mixed in fresh concrete and prior permission from Engineer-in-charge shall be obtained for dosage and compatibility 2. Test certificate of cement, procured from dealer/company to be submitted for all cement related works by the Contractor. 3. The rate shall be quoted on the basis of using minimum cement per cu.m. of concrete mentioned below for relevant grade of concrete. Any upward/ Downward variation required to obtain the specified strength will be paid for or deducted at the rate of Rs.8/Kg of cement . M30 grade with 350 kg. of Ordinary Portland Cement per cu.m. of concrete all works Above plinth level.	64.00	CuM	10500.00	Rupees Ten Thousand Five Hundred Only	672000	-
1.05							

पूर्व लेखा परीक्षा में प्रमाणित
Certified in Pre-Audit

पूर्व लेखा परीक्षा में प्रमाणित
Certified in Pre-Audit

रक्षक/छात्र/प्रधान (वि एवं ले)
DA/DMM/MSM/Head (F&A)

1.06	Providing, straightening, decolling wherever necessary bending, cutting, binding and fixing in position steel reinforcement TMT bars of Fe500D grade steel conforming to IS:1786 'SAIL' or VIZAG or approved equivalent make' and lying with approved annealed binding wire of 1.6mm dia in all reinforced concrete work at all lifts, including cost of supplying and fixing the spacer/cover blocks in cement mortar 1:2 and binding wire complete all as per specification and as directed by Engineer-in-Charge at all lifts. Note: The rate shall be including the cost of reinforcement steel. The reinforcement steel will be procured from dealers with a test certificate as approved by the department.	14.00	MT	105000.00	Rupees One Lakh Five Thousand Only	1470000	-
1.07	Supplying, fabricating, erecting and fixing in position at all levels, centering and shuttering to correct line and levels including strutting, propping, etc., with necessary bracing in all axes to give a stable assembly with provision for making the joints in the shuttering fully leak proof and with provision for fixing coil nuts with tie rods along with suitable channel for lateral supports and for inserts, projecting dowels, anchor bolts or any other fixture, including staging, access and working platforms etc., all complete as specified and directed as per Engineer-in-charge including dismantling and removing the aforesaid assembly after the concrete attains the sufficient strength to self-support itself without cracking and distortion all as per specification, including all materials and labour complete in all respects at all lifts. (The measurement for the formwork will be the actual area of forms in contact with concrete surfaces.) Shuttering with plywood panels alone will be permitted	650.00	SqM	1075.00	Rupees One Thousand Seventy Five Only	698750	-
1.08	Providing and constructing brick masonry at all lifts using well burnt stock bricks in cement mortar 1:5 including suitable scaffolding, raking out joints, curing complete as per specifications and drawings for foundation, superstructure, etc. for the following floors as directed by Engineer-in-Charge.	70.00	CuM	11000.00	Rupees Eleven Thousand Only	770000	-
1.09	Providing and constructing at all floors and lifts 115mm thick brick work in cement mortar 1:4 using well burnt bricks including placing in position 2 nos of 8mm dia rods at every 3rd layer, scaffolding, curing, racking out the joint on both faces etc. complete as per specification and as directed by the Engineer-in-Charge. The quoted rate for the above shall be inclusive of 2 nos of 8mm dia rods at every 3rd layer	20.00	SqM	1350.00	Rupees One Thousand Three Hundred Fifty Only	27000	-
1.10	Providing plastering to the internal surfaces of brickwork/concrete at all elevations in cement mortar 1:5, 12mm thick including hacking of concrete surfaces with pointed tool, scaffolding, finishing, curing, forming grooves wherever necessary, all as per specifications.	430.00	SqM	450.00	Rupees Four Hundred Fifty Only	193500	-
1.11	Providing plastering to the external surfaces of brickwork/concrete at all elevations in cement mortar 1:5, 20mm thick in two coats including hacking of concrete surfaces with pointed tool, scaffolding, finishing, curing, forming grooves wherever necessary, all as directed by the Engineer-in-Charge per specifications.	440.00	SqM	500.00	Rupees Five Hundred Only	220000	-
1.12	Providing and fixing VITRIFIED Double charged floor tiles in different sizes with water absorption less than 0.08% and confirming to IS 15622 of Marbonite or approved make in all colours and shades in Glossy or Matt or satin finish (as required by Engineer-in-charge) laid over a bed of minimum 20mm thick bed of cement mortar 1:4 (in skirting, risers of steps and dados over 12mm thick bed of cement mortar 1:3) including machine/hand cutting to required size & shape, grouting the joints with white cement mixed with coloring pigment to match colour of tile patterns, curing, cleaning the surface neatly at the time of handing over the area complete all as per drawings and specifications. Note: The sample tile shall be got approved by the Architect/Engineer before procurement. In flooring, tile size of 600x600mm fixing with 20mm thick bedding in cement mortar 1:4	160.00	SqM	2100.00	Rupees Two Thousand One Hundred Only	336000	-
1.13	Providing and fixing 1st quality Ceramic glazed floor/wall tiles confirming to IS 15622 of approved make in approved size, shade and colour (as approved by Engineer-in-charge), free from cracks, fissures & flakes with straight edges & perfect corners fixed at right angles as per design and pattern required over a bed of 20mm thick bed of cement mortar 1:4 (in skirting, risers of steps and dados over 12mm thick bed of cement mortar 1:3), including machine / hand cutting to required size and shape, pointed neatly with white cement mixed with coloring pigment to match colour of tile, properly finished in all respects, curing, cleaning the surface neatly at the time of handing over the area, all materials and labour complete. In flooring fixing with 20mm thick bedding in cement mortar 1:4 Note: The sample tile shall be got approved by the Architect/Engineer before procurement.	80.00	SqM	1800.00	Rupees One Thousand Eight Hundred Only	144000	-
1.14	Providing and fixing Chequered Precast Cement Concrete Tiles 22mm thick in foot path & courtyard, jointed with neat cement slurry mixed with pigment to match the Shade of tiles. Including rubbing and cleaning etc. complete on 20mm thick bed of cement mortar 1:4 (1 cement: 4 coarse sand), setting the tiles in cement slurry including pointing the joints with white cement with matching colour pigments, curing and cleaning the external face of tiles by water sponging complete all as per specification and as directed by the Engineer-in-Charge.	65.00	SqM	1700.00	Rupees One Thousand Seven Hundred Only	110500	-
1.15	Providing and applying painting Two coats at all levels with premium Plastic emulsion paint (Asian - Tractor shine or Equivalent approved brand, colour and manufacturer) to give an even shade including one under coat of cement primer, applying putty to make plain and smooth surface, preparation of the surfaces, scaffolding complete all as per specifications and as directed by the Engineer-in-Charge.	620.00	SqM	315.00	Rupees Three Hundred Fifteen Only	195300	-
1.16	Providing and applying painting Two coats at all levels with Acrylic emulsion paint (Asian - Apex or Equivalent approved brand, colour and manufacturer) to give an even shade including one under coat of suitable primer, preparation of the surfaces, scaffolding complete all as per specifications and as directed by the Engineer-in-Charge.	400.00	SqM	300.00	Rupees Three Hundred Only	120000	-

Certified in the Audit

संस्था/कार्य/प्रमाण (विशेष के)
DPS N/S/M/Head (R&N) Wk

1.17	Providing and applying painting Two coats at all levels with premium Synthetic Enamel paint (Asian or Equivalent approved brand, colour and manufacturer) to give an even shade including one under coat of suitable primer, applying putty, preparation of the surfaces, scaffolding complete all as per specifications and as directed by the Engineer-in-Charge.	40.00	SqM	275.00	Rupees Two Hundred Seventy Five Only	11000	-
1.18	Providing and fixing for Kadappa stones slabs of 15 to 20mm thick for cupboards etc., including labour, materials and all as per specifications and as directed by the Engineer-in-Charge.	10.00	SqM	600.00	Rupees Six Hundred Only	6000	ALR
1.19	Supply and fixing of Green chalk Writing Board of approved size of make schoolneeds or Corporate Concepts or Alkosisign made from high quality hard dry wipe Green chalk laminate over 10mm thick MDF board framed with 25mm thick double sided curved heavy anodized aluminum sections and Chromium plated plastic corners including backed with PVC sheet, providing concealed clamps at the back side for wall mounting, providing and fixing of chalk tray at bottom side, etc., complete.	10.00	SqM	3500.00	Rupees Three Thousand Five Hundred Only	35000	-
1.20	Providing and laying pressed flat clay tiles 230 x 230mm size and 16 to 18 mm thick tiles on roof slab jointed with cement mortar 1:3 (1 cement : 3 coarse sand) mixed with 2% integral waterproofing compound laid over a bed of 20mm thick cement mortar 1:3 and finished neat complete all as per specifications and as directed by the Engineer-in-Charge.	180.00	SqM	1250.00	Rupees One Thousand Two Hundred Fifty Only	225000	-
1.21	Providing, supplying, cutting, bending to shape, welding, fabricating, hoisting, placing and fixing in position structural steel members like MS structural embedment/sipre and sleeves/penetration etc. using MS angles, channels, I-sections, plates, tees, flats, rounds, square sections etc. including chamfering and rounding off the edges, applying a coat of Red lead paint primer / Zinc chromate primer of approved make and 2 coats of flat oil paint / synthetic enamel paint of approved colour and make, scaffolding and staging required for fabrication as well as erection complete all as per specifications, drawings and as directed by the Engineer-in-charge. Note: Lifting device arrangements if any required Shall also be arranged by the contractor at his own cost.	1.30	MT	120000.00	Rupees One Lakh Twenty Thousand Only	156000	-
1.22	Supplying and fixing UPVC (Un-Plasticized Polyvinyl Chloride) Louvered Ventilators of from the profile the size of outer frame 60mm x 58mm and shutter profile size of 60 x 78mm both profiles are reinforced with GI/1mm 125GSM and 100% corrosion free, the profile are multi chambered sections with wall thick of 2mm. The EPDM rubber (black colour) covered with all over the edges of frame and shutter. The corners and joints should be welded and cleaned. Radiations pin headed glass 4mm thick should be provided in the louvers. The window should be fixed to the wall with 100% packing with screws and silicon packing all round the frames. The ventilator should be got approved from the Engineer in charge before use on work.	1.20	SqM	6500.00	Rupees Six Thousand Five Hundred Only	7800	ALR
1.23	Providing factory made pre-laminated FPVC (Formed Polyvinyl Chloride) Door Frame of the size 105 x 40mm with a wall thickness of 10mm made out of extruded rigid FPVC profile mitre joined with 6 Nos. of 5mm long screw. The door frame shall be fixed to the wall by using 80mm long screws through the frame with the help of PVC fasteners of 3 Nos. to be provided for each vertical member, GI stiffeners of (U' channel of size 29 x 9, 1mm, 150mm long) - 3 Nos. at hinge point, frame reinforcement of (U' GI channel of size 46 x 22 x 0.6mm), bottom tie rod of (U' GI channel size of 15 x 15 x 1mm), etc., complete complying with the standard specification. The door frame should be got approved from the Engineer in Charge before use on work.	13.00	RM	700.00	Rupees Seven Hundred Only	9100	-
1.24	Providing of 35mm thick factory made pre-laminated ABS (Acrylonitrile Butadiene Styrene) Door Shutter moulded in different designs, consisting of all round frame made out of water proof solid foam PVC bar of size 20 x 32mm, reinforced by 32 x 32mm - 2 Nos., for vertical made out of LVL (Laminated Veneer Lumber), core material of 32mm thick high density craft paper honey comb board, sandwiched on both sides with pre-laminated ABS sheet thickness of 1.5mm. PVC edge banding of size 0.45mm on the vertical sides. Hardware made out of steel coated butterfly hinges - 3 Nos., for each shutter and ISI make SS round lock complete for finished item of work, complete complying with the standard specification. The door shutter and frame should be got approved from the Engineer in Charge before use on work. Plain Pre-laminated Door.	4.20	SqM	7500.00	Rupees Seven Thousand Five Hundred Only	31500	-
1.25	Providing and fixing PVC rain water downtake pipes conforming to IS:13592 Type A and PVC SWR Fittings & specials confirming to IS:14735, 'Finolex' or other approved equivalent make of pipes, fittings & specials including jointing with seal ring / with PVC solvent adhesive including fixing in walls/columns using clamps, anchor fasteners, bolts and leakproof packing pieces, joint testing etc complete all as per drawings, specifications and as directed by the Engineer-in-Charge. PVC SWR Rain water pipe 110mm outer dia	25.00	RM	500.00	Rupees Five Hundred Only	12500	-
1.26	Providing and fixing Un-Plasticized Polyvinyl Chloride (UPVC) pipes, having thermal stability for hot & cold water supply including all UPVC plain & brass threaded fittings This includes jointing of pipes & fittings with one step UPVC solvent cement, trenching, refilling and testing of joints complete as per direction of Engineer in Charge. 25mm Nominal dia Pipe For External work	35.00	RM	450.00	Rupees Four Hundred Fifty Only	15750	-
1.27	Providing and fixing Chlorinated Polyvinyl Chloride (CPVC) pipes, having thermal stability for hot & cold water supply including all CPVC plain & brass threaded fittings I/c fixing the pipe with clamps at 1.00 m spacing. This includes jointing of pipes & fittings with one step CPVC solvent cement, trenching, refilling and the costly of cutting chases and making good the same including testing of joints complete as per direction of Engineer in Charge. 20mm Nominal dia Pipe for Concealed work, including chases and making good the wall etc.	40.00	RM	700.00	Rupees Seven Hundred Only	28000	-
1.28	Providing and fixing the of UPVC ball valves used for commercial applications operate and designed to handle higher water pressure etc., complete all as per specification and as directed by the Engineer-in-Charge. 25mm nominal bore.	4.00	Nos	450.00	Rupees Four Hundred Fifty Only		


1800 लेखा परीक्षा - प्रमाणित
 DA/DN/M/SM/Heart (P.D.A.)
 रसिम

1.29	Providing and fixing Heavy Quality C.P. brass 15mm dia long body Bib cock of "Parryware" or approved equivalent make as per specifications and as directed by the Engineer-in-Charge. (Samples to be got approved by the Engineer-in-Charge)	5.00	Nos	1200.00	Rupees One Thousand Two Hundred Only	6000	-
1.30	Providing and fixing white vitreous China pedestal type water closet (European type W.C. Pan) of (Parryware Model No.C0220 or Equivalent make) with seat and lid 10 litre low level white P.V.C flushing cistern, including flush Pipe, with manually controlled device (handle lever), conforming to IS:7231, with all fittings and fixtures complete, including cutting and marking good the walls and floors whatever required complete all as per specifications and as directed by the Engineer-in-Charge.	2.00	Nos	8000.00	Rupees Eight Thousand Only	16000	-
1.31	Providing and fixing Heavy Quality C.P. Brass Health Faucet with 1.50metres flexible hose (Hand Shower) of Parryware brand complete all as per specifications and as directed by the Engineer-in-Charge (Samples to be got approved by the Engineer-in-Charge)	2.00	Nos	1300.00	Rupees One Thousand Three Hundred Only	2600	-
1.32	Providing and fixing Viterious China white wash basin size 550x400mm/550x420mm (PARRYWARE) with C.I. brackets, 15mm C.P. brass pillar taps of Parryware or approved equivalent make, 15mm x 600mm long PVC Inlet connection, 32mm Heavy quality C.P. brass waste coupling of standard pattern 32mm dia 'B' Class GI Waste Pipe 15mm dia GM Wheel Valve, 15mm dia Nylon Connection, 15mm dia brass Nipples, including painting of fittings and brackets, cutting and making good the walls and testing complete all as per specifications and as directed by the Engineer-in-Charge.	2.00	Nos	4500.00	Rupees Four Thousand Five Hundred Only	9000	-
1.33	Providing, hoisting and installing at required elevation moulded HDPE cylindrical vertical water storage tanks conforming to IS:12701 make of the following capacities with suitable S. M. C Cover at top including the cost of labour for making hole in the storage tank for inlet, outlet, scour and overflow, providing and fixing necessary G.I Nipples ranging from 15mm to 50mm n.b of average 150mm length with double check nuts, washers etc. complete all as directed by the Engineer-in-Charge. HDPE Cylindrical Vertical Storage Water Tank 1000 Litre Capacity	1.00	Nos	13000.00	Rupees Thirteen Thousand Only	13000	-
1.34	Hiring charges for Deployment of One JCB including fuel and driver wages, etc for miscellaneous excavation, dismantling, breaking, levelling, jungle clearing etc., all as per specification and as directed by Engineer-in charge.	10.00	Per Hour	1400.00	Rupees One Thousand Four Hundred Only	14000	-
1.35	Providing and Fixing 18mm thick Jet black or approved make Granite inaugural plaque with granite stone engraved with artistic letters and golden colour painting for lettering, including cost of labour and material for fixing on a wall all as per specifications and as directed by the Engineer-in-Charge.	.85	Sqm	14000.00	Rupees Fourteen Thousand Only	11900	-
1.36	Painting of all size of letters, artistic painting of different colours/designs/patterns over board with Enamel Paint including scaffolding erection, surface preparation, Applying putty and back round painting (walls, steel plates, banners etc.), the rate including cost of labour, material, burs, , complete to maximum height of 13 meters, all as per specifications and as directed by the Engineer-in-Charge.	13.00	Sqm	2000.00	Rupees Two Thousand Only	26000	-
1.37	Providing and fixing Stainless steel (Grade 304) railing made of Hollow tubes channel, plates etc., including welding, grinding, buffing, polishing and making curvature (wherever required) and fitting the same with necessary stainless steel nuts and bolts complete, i/c fixing the railing with necessary accessories & stainless steel dash fasteners, stainless steel bolts etc., of required size, on the top of the floor or the side of waist slab with suitable arrangement as per approval of Engineer-in-Charge, (for payment purpose only weight of stainless steel member shall be considered excluding fixing accessories such as nuts, bolts, fasteners etc.).	350.00	Kg	400.00	Rupees Four Hundred Only	140000	ALR
1.38	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded build up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS:733 and IS: 1285, fixing with dash fasteners of required dia size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, milled and jointed mechanically wherever required including Cleat angle, Aluminium snap beading for glazing / paneling, C.P brass/Stainless screws. all complete as per the directions of Engineer-in-Charge. (Glazing, paneling and dash fasteners to be paid for separately) For shutters of doors, windows & ventilators including providing and fixing hinges/ pivots and making provision for fixing of fittings wherever required including the cost of EPDM rubber / neoprene gasket required (fittings shall be paid for separately) Anodised aluminium (anodised transparent or dyed to required shade according to IS: 1868. Minimum anodic coating of grade AC 15)	340.00	Kg	800.00	Rupees Eight Hundred Only	272000	-
1.39	Providing and fixing 12 mm thick prelaminated particle board flat pressed three layer or graded wood particle board conforming to IS: 12823 Grade I Type II, in paneling fixed in aluminium doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per directions of engineer-in-charge. Pre-laminated particle board with decorative lamination on both sides.	21.00	Sqm	1236	Rupees One Thousand Two Hundred Thirty Six Only	25956	-
2.00	Part-B (Electrical Works)						
2.01	Supply and installation of 1 inch PVC conduit 2mm thick with ISI mark for concealed wiring. Make: Modi / Precision	175.00	RM	70.00	Rupees Seventy Only	12250	-
2.02	Supply and installation of 1 inch PVC conduit bend/ coupling. Make: Modi / Precision	90.00	Nos	25.00	Rupees Twenty Five Only	2250	-
2.03	Supply and installation of Heavy PVC / Metal Fan Box.	10.00	Nos	225.00	Rupees Two Hundred Twenty Five Only	2250	-

View/Sign/Stamp/Seal
 DA/DM/BS/Head (Signature)
 Certified in Pre-Audit
 ५६ अंतरा रक्षित है पारदर्शिता

2.04	Supply and installation of 4 way / 3 way / 2 way 1 inch PVC deep and wall junction box for concealed wiring. Make: Modi / Precision	50.00	Nos	55.00	Rupees Fifty Five Only	2750	-
2.05	Supply and installation of 6M GI box with cover plate for fixing modular switch. Make: L&T / Legrand / Anchor	2.00	Nos	500.00	Rupees Five Hundred Only	1000	-
2.06	Supply and installation of 12M GI box with cover plate for fixing modular switch. Make: L&T / Legrand / Anchor	2.00	Nos	900.00	Rupees Nine Hundred Only	1800	-
2.07	Supply and installation of 12x8 inches wooden / GI box (Make: L&T / Legrand / Anchor) for earth and neutral wire distribution with suitable size of links and hylum sheet.	5.00	Nos	500.00	Rupees Five Hundred Only	2500	-
2.08	Supply and installation of ceiling rose with PVC dummy sheet. Make: Anchor / Colors / Fybros	20.00	Nos	75.00	Rupees Seventy Five Only	1500	-
2.09	Supply and installation of 4 feet 20W to 24W 230V AC, LED tube light. Make: Philips / CGI Bajaj / Suriya	20.00	Nos	350.00	Rupees Three Hundred Fifty Only	7000	-
2.10	Supply and installation of 12 inches Electric gong bell including 1No 6A/10A bell push switch with 2M GI metal box. Make: Edison / Navkar / Swaggers	1.00	Nos	4000.00	Rupees Four Thousand Only	4000	-
2.11	Supply and installation of High Speed / Heavy duty Ceiling fan complete with 450mm to 600 mm down rod, safety (hanging) rope, canopies, shackles and blades working on 230/240V single phase AC, 1200 mm sweep, 370 to 425 rpm. Make: Usha / Havells / CG / Bajaj / Polar / Almondard	10.00	Nos	3500.00	Rupees Three Thousand Five Hundred Only	35000	-
2.12	Supply and installation of 20 W to 25 W LED 230V AC ceiling / surface mounted fitting. Make: CG / Philips/Suriya/ Bajaj	5.00	Nos	1300.00	Rupees One Thousand Three Hundred Only	6500	-
2.13	Supply and installation of 1 way 6A/10A modular switch. Make: Anchor-Roma / Crabtree	25.00	Nos	95.00	Rupees Ninety Five Only	2375	-
2.14	Supply and installation of 6A/10A, 3 pin modular socket. Make: Anchor-Roma / Crabtree	4.00	Nos	180.00	Rupees One Hundred Eighty Only	720	-
2.15	Supply and installation of 60-72W LED Street light with suitable length of GI pipe. Make: CG / Philips/Suriya/ Bajaj/ Havells	2.00	Nos	3500.00	Rupees Three Thousand Five Hundred Only	7000	-
2.16	Supply and installation of SPN 6 way Double door DB. Make: L&T / Legrand.	1.00	Nos	1800.00	Rupees One Thousand Eight Hundred Only	1800	-
2.17	Supply and installation of 2-Pole 25 Amps., 30mA ELCB/RCCB Make: L&T / Legrand	1.00	Nos	2500.00	Rupees Two Thousand Five Hundred Only	2500	-
2.18	Supply and installation of 1-Pole 6A / 10A MCB. Make: L&T / Legrand	3.00	Nos	275.00	Rupees Two Hundred Seventy Five Only	825	-
2.19	Supply and laying of 2.5 sq.mm single core multistrand FRLS copper wire. Make: Finolex / Havells / Zflex / orbit	990.00	RM	50.00	Rupees Fifty Only	49500	-
2.20	Supply and laying of 4.0 to 6.0 sq.mm single core multistrand FR / FRLS Aluminium wire Make: Finolex / Havells / RR Kabel / KEI / orbit	120.00	RM	55.00	Rupees Fifty Five Only	6600	-
2.21	Supply and installation of 10 Sqmm 3 core Aluminium armoured FRLS cable Make: Finolex/havells/RR Kabel/KEI/Orbit	120.00	RM	400.00	Rupees Four Hundred Only	48000	-
2.22	Supply and installation of earth electrode 2mm thick pipe of 60mm dia and 3m length including the construction of 2x2 feet earth chamber with precast concrete lid.	1.00	Nos	10000.00	Rupees Ten Thousand Only	10000	-
2.23	Supply and installation of 8 SWG Solid copper wire for earthing.	30.00	RM	200.00	Rupees Two Hundred Only	6000	-
2.24	Supply and installation of Material required for TNEB Connection as per Tamil nadu Govt. current norms (Single Phase)	1.00	Nos	11000.00	Rupees Eleven Thousand Only	11000	-
TOTAL						7326326	-

(तिहत्तर लाख छब्बीस हजार तीन सौ छब्बीस)



वरि.अनु.अभि.(सिविल अनुरक्षण) SME (Civil)
मद्रास परमाणु विद्युत केंद्र Madras Atomic Power Station
कल्पाकम् Kalpakam

इ. प्रथम एडि. E. PARANDHAMA REDDY
प्रभारी अभियंता (सिवा परिरक्षक मरम्मत एवं उन्नयन कार्य)
Engineer in-Charge (Siv. Parirakshak Maramat Evam Uन्नयन Karay)
रसूचिवायर पॉवर कॉर्पोरेशन ऑफ इंडिया लिमिटेड
NUCLEAR POWER CORPORATION OF INDIA LIMITED
भारत सरकार का उद्यम A Government of India Enterprise
मद्रास परमाणु विजलीघर Madras Atomic Power Station

अनुसूची "बी"
SCHEDULE 'B'
संविदाकार को जारी करने के लिए सामग्री
MATERIAL FOR ISSUE TO THE CONTRACTOR
(खण्ड सं.15 देखें See Clause No. 15)

कार्य का नाम: मपबिघ निगम सामाजिक उत्तरदायित्व गतिविधियों के अंतर्गत तिरकलुकुन्द्रम में दिव्यांग छात्राओं के लिए स्कूल भवन निर्माण करने।

NAME OF WORK: Construction of School Building for persons with Disability students at Thirukalukundram under MAPS CSR Activities.

क्र.सं. Sl. No	सामग्री का विवरण Particulars of material	यूनिट Unit	सामग्रियों को जारी किए जाने की दर Rate at which materials to be issued	अधिकतम अदृश्य अपशिष्ट (अप्रत्यावर्तनीय) Max. invisible wastage (Non- returnable) %	अधिकतम अनुमेय अपशिष्ट (मुक्त जारी होने पर प्रत्यावर्तनीय) रका Max. permissible waste (returnable in case of free issue)%*	जारी की जाने वाली मात्रा (लगभग) Quantity to be issued (approx)
1	2	3	4	5	6	7
शून्य NIL						

* प्रभारी अभियंता द्वारा अनुमोदित कटिंग प्लान के अनुसार यह प्रतिशत बदल सकता है।

* This percentage can vary as per the cutting plan approved by Engineer In-Charge.

जारीकर्ता अधिकारी के हस्ताक्षर
Signature of Issuing Officer

दिनांक Date _____

संविदाकार का हस्ताक्षर
Signature of Contractor

दिनांक Date _____


ई. परंधामा रेड्डी E. PARANDHAMA REDDY
प्रभारी अभियंता (सिरा परिरक्षक मरम्मत एवं उन्नयन कार्य)
Engineer in-Charge (End Shield Repair & Upgradation Works)
न्यूक्लियर पावर कॉर्पोरेशन ऑफ इंडिया लिमिटेड
NUCLEAR POWER CORPORATION OF INDIA LIMITED
(भारत सरकार का उद्यम A Government of India Enterprise)
मद्रास परमाणु विजलीघर Madras Atomic Power Station
कल्याणम् Kalakkam-603 102

फार्म-V FORM-V

[नियम 21(2) को देखें | See Rule 21 (2)]

प्रधान नियोक्ता द्वारा प्रमाणपत्र का फार्म

FORM OF CERTIFICATE BY PRINCIPAL EMPLOYER

प्रमाणित किया जाता है कि मैंने आवेदक मेसर्स _____ को अपनी स्थापना में एक संविदाकार के रूप में लगाया है। मैं अपनी स्थापना में आवेदक द्वारा संविदा श्रम के नियोजन के संबंध में प्रावधानों जहां तक कि मेरे लिए लागू है, संविदा श्रम (विनियमन और उत्सादन) अधिनियम, 1970 और संविदा श्रम (विनियमन और उत्सादन) केंद्रीय नियम 1971 के सभी प्रावधानों से बाध्य होने के लिए वचनबद्ध हूँ।

Certified that I have engaged the applicant M/s _____ as a Contractor in my Establishment. I undertake to be bound by all the provisions of the Contract Labour (Regulations and Abolition) Act, 1970 and the Contract Labour (Regulations and Abolition) Central Rules 1971, in so far as the provisions are applicable to me in respect of the employment of contract labour by the applicant in my Establishment.

प्रधान नियोक्ता के हस्ताक्षर Signature of the Principal Employer

स्थापना का नाम और पता Name and Address of the Establishment

स्थान Place:

दिनांक Date:



ई. परंधामा रेड्डी E. PARANDHAMA REDDY
प्रभारी अभियंता (सिरा परिरक्षक मरम्मत एवं उन्नयन कार्य)
Engineer In-Charge (End Shield Repair & Upgradation Works)
न्यूक्लियर पावर कॉर्पोरेशन ऑफ इंडिया लिमिटेड
NUCLEAR POWER CORPORATION OF INDIA LIMITED
(भारत सरकार का उद्यम A Government of India Enterprise)
मद्रास परमाणु विजलीघर Madras Atomic Power Station
कल्याणम् Kalbakkam-603 102

Signature Not Verified

Digitally signed by R THIRUMURUGAN

Date: 2025.01.27 17:33:04 IST

Location: eProcurement System for Central PSUs