



ONGC LTD
EASTERN OFFSHORE ASSET
ENGINEERING SERVICES
2ND FLOOR, Logistics Park, Vakalapudi, KAKINADA-533005
Ph: 0884 – 2322242, 2322251

No. KC1ML24002/96

Dt: 27-09-2024

Letter of Acceptance cum Work Order

M/s Sree Harika Engineers & Builders

(Vendor Code: 900337)

Flat No-201, Geetha Tower,

Kirlampudi Layout, Visakhapatnam

530017, AP

Name of Work: Providing RCC Flooring inside Dyke wall Area around Condensate Tanks and Slope Tank in OGT, HPHT Asset, ONGC Kakinada, P. Mallavaram

Tender No.: KC1ML24002

Dear Sir,

Your tender for the above work has been accepted on behalf of Oil and Natural Gas Corporation Limited at the quoted percentage of **(-) 18% Below** the estimated cost put to tender and the order amount is Rs. 2,40,89,492.24/- (Rupees Two Crore Forty Lakhs Eighty Nine Thousand Four Hundred Ninety Two and Paise Twenty Four only).


Kindly acknowledge receipt of this Letter of Acceptance cum Work Order within 3 days from the date of issue of this letter.

You are requested to submit **PERFORMANCE SECURITY @ 10 %** of the awarded value i.e. Rs. 24,08,950/- (Rupees Twenty Four Lakhs Eight thousand Nine Hundred Fifty only) within 15 (Fifteen) days from the date of issue of this LOA cum WO.

In the event of failure to submit the PBG without valid reason within 15 (Fifteen) days from the date of issue of this letter, the acceptance of your tender shall be considered as withdrawn.

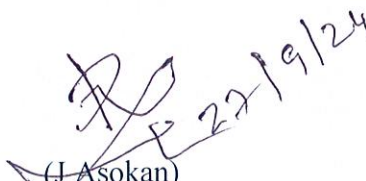
The time limit for completion of work is 06 (Six) Months from 7th day of issue of the work order or date of handing over of site whichever is later.

You are required to execute an agreement on non-judicial stamped paper worth Rs. 100/- within 30 days from the date of this LOA cum WO.


J. ASOKAN
General Manager (Civil)

Shri Naresh Marothia, EE(Civil) will be the Project Coordinator for this work. All future correspondence shall be made with him

Encl: Schedule - B


(J Asokan)
GM (Civil)-LM(Works)

Copy to:

1. GGM(P)-Surface Manager
2. CGM(M)- Head Engineering Services
3. CGM (F & A)-Head Finance
4. GM(P)-SAM, OGT
5. EE (Civil)
6. Tender File
7. Agreement Copy

	Name of Work: Providing RCC Flooring inside Dyke wall Area around Condensate Tanks and Slope Tank in OGT, HPHT Asset, ONGC Kakinada, P. Mallavaram	LOA cum WO No KC1ML24002/96 Dated: 27.09.2024
---	---	---

(Schedule-B)

S. No.	DESCRIPTION OF ITEM	Quantity	Unit	Rate (Rs.)	Amount (Rs.)
1	Clearing grass and removal of the rubbish up to a distance of 50 m outside the periphery of the area cleared	5620.00	Sqm	₹ 9.76	₹ 54,851.20
2	Earth work in surface excavation not exceeding 30 cm in depth but exceeding 1.5 m in width as well as 10 sqm on plan including getting out and disposal of excavated earth upto 50 m and lift upto 1.5 m, as directed by Engineer-in- Charge: All kinds of Soil	5620.00	Sqm	₹ 141.54	₹ 7,95,454.80
3	Carriage of Materials: By Mechanical Transport including loading,unloading and stacking: Earth for 2 km lead	1124.00	Cum	₹ 267.94	₹ 3,01,164.56
4	Supplying and filling in plinth with sand under floors, including watering, ramming, consolidating and dressing complete	570.00	Cum	₹ 2,314.89	₹ 13,19,487.30
5	Providing and laying in position ready mixed or site batched design mix cement concrete for plain cementconcrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana/ Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering and finishing as per direction of the engineer-in-charge; for the following grades of concrete. Note: Extra cement up to 10%of the minimum specified cement content in design mix shall be payable separately. In case the cement content in design mix is more than 110% of the minimum specified cement content, the contractor shall have discretion to either re-design the mix or bear the cost of extra cement. All works upto plinth level : Concrete of M10 grade with minimum cement content of 220 kg /cum	570.00	Cum	₹ 9,630.31	₹ 54,89,276.70

 27/9/24

J. ASOKAN
General Manager (Civil)

6	Providing and laying in position ready mixed or site batched design mix cement concrete for reinforced cement concrete work; using coarse aggregate and fine aggregate derived from natural sources, Portland Pozzolana / Ordinary Portland /Portland Slag cement, admixtures in recommended proportions as per IS: 9103 to accelerate / retard setting of concrete, to improve durability and workability without impairing strength; including pumping of concrete to site of laying, curing, carriage for all leads; but excluding the cost of centering, shuttering, finishing and reinforcement as per direction of the engineer-in-charge, for the following grades of concrete.: Note: Extra cement up to 10% of the minimum specified cement content in design mix shall be payable separately. In case the cement content in design mix is more than 110% of the specified minimum cement content, the contractor shall have discretion to either re-design the mix or bear the cost of extra cement. All works upto plinth level: Concrete of M25 grade with	1130.00	Cum	₹ 10,360.18	₹ 1,17,07,003.40
7	Steel reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete upto plinth level. Thermo-Mechanically Treated bars of grade Fe-500D or more.	79100.00	Kg	₹ 117.56	₹ 92,98,996.00
8	Centering and shuttering including strutting, propping etc. and removal of form for : Foundations, footings, bases of columns, etc. for mass concrete	360.00	Sqm	₹ 427.44	₹ 1,53,878.40
9	Providing and fixing in position 12 mm thick bitumen impregnated fiber board conforming to IS: 1838, including cost of primer, sealing compound Grade-A in	360.00	Per CM Depth per 100m	₹ 714.77	₹ 2,57,317.20
Total (A)					₹ 2,93,77,429.56
Deduct Quoted Tender Percentage @ (-)18% (B=0.18*A)					₹ 52,87,937.32
Total Work Order Value (C=A-B)					₹ 2,40,89,492.24

 27/9/24

J. ASOKAN
General Manager (Civil)